

Part No. WATT-518FS-XX

18GHz SMA 5W Fixed Attenuator



Features:

- Smallest models made
- Low VSWR
- All attenuation values available



Electrical Specification

Frequency	DC-18GHz
Attenuation Availability	1.3.6.11.12.15.20.30.40 dB
Accuracy (Max)	0-6dB +/- 0.4dB 7-20dB +/- 0.5dB 30dB +/- 0.75dB 40dB +/-1.25dB XX: 01=1dB , 02=2dB
V.S.W.R (Max.)	DC-12.4Hz :1.25 12.4-18GHz:1.30
Input Power	Avg. 5Watts @25°C, Peak : 500Watts (5 Usec Pulse, 0.10% Duty Cycle)
Impedance	50 ohm


Environmental Specification

Operating Temperature	-65~+125°C
-----------------------	------------


Outline

Unit:mm

1-30dB

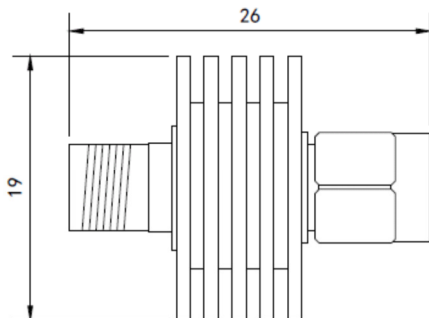

40dB

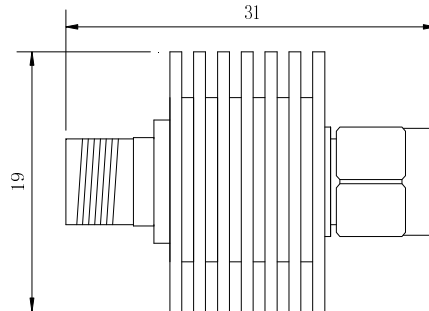

Test Report

