



00100A1A100XXX

Cable Assembly

SMA(M) – 客製剥線 for RG316 Cable Assembly

Features

- High Repeatability
- Low VSWR



Electrical Specifications

Impedance	50Ohm
Connection 1	SMA Male
Connection 2	Open & Tinned(Stripped Size:Customized)

Material


Part	Material	Plated
1.SMA Connector		
Body	Brass	Gold
Center Pin	Brass	Gold
Insulator	Teflon	
2.Cable		
RG316 Coaxial Cable		Brown
3.Sleeve		Black

Mechanical

Durability	500 Cycles
------------	------------

Outling Drawing (Unit:mm)

DIMENSIONS	TOLERANCES
0.5~10mm	±0.2
11~100mm	±5.0
101~500mm	±10.0
501~1000mm	±15.0
1001~2000mm	±20.0
2000~5000mm	±50.0

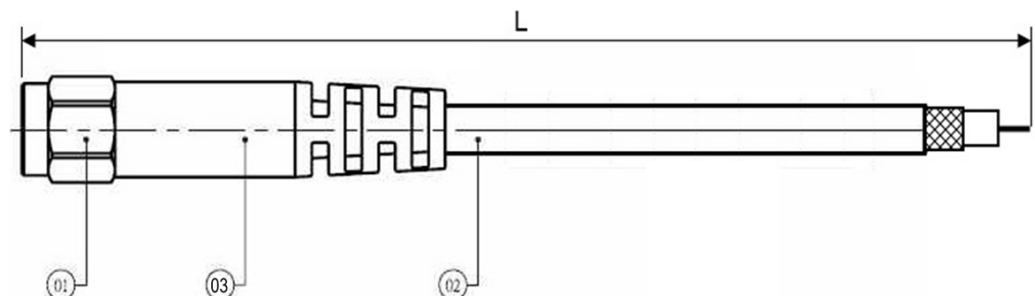




Wake up your further dream.



RG316 Cable Physical Characteristics

Center Conductor	Construction Size	0.175mm
	Standard Diameter	0.53mm Silver Coated Copper Clad Steel
Insulation	Average Thickness	0.51mm
	Diameter	1.53±0.03mm FEP
Braid Shield	Construction	16/5/0.10 mm
	Coverage	95%
	Diameter	1.98±0.05mm Silver Coated Copper
Jacket	Average Thickness	0.30mm
	Overall Diameter	2.53±0.10mm FEP(Brown)
Min. Bending Radius	12.7mm	

RG316 Cable Electrical Characteristics

Impedance	50 ± 3ohms	
Capacitance	95.8±3pF/m	
Conductor Resistance	302 ohms/KM at 20°C (max.)	
Operating Temperature	-55~ 200°C	
Velocity of propagation	69%	
Max Frequency	3GHz	
 Maximum Attenuation(dB/M) @	1GHz	1.25
	1.8GHz	1.51
	2.4GHz	1.71
	3GHz	1.92

整條 Assembly 之 Loss 為以下 3 項數值之加總

1. 接頭 Loss : 0.06 x $\sqrt{\text{頻率}}$ (2 端都有接頭則需將此數值 x2)
2. 組裝 Loss : 0.12 (2 端都有組裝則需將此數值 x2)
3. 線材 Loss : 依上述 Maximum Attenuation 換算需求長度之 Loss