




RG316 Cable Physical Characteristics

Center Conductor	Construction Size	0.175mm
	Standard Diameter	0.53mm Silver Coated Copper Clad Steel
Insulation	Average Thickness	0.51mm
	Diameter	1.53±0.03mm FEP
Braid Shield	Construction	16/5/0.10 mm
	Coverage	95%
	Diameter	1.98±0.05mm Silver Coated Copper
Jacket	Average Thickness	0.30mm
	Overall Diameter	2.53±0.10mm FEP(Brown)

RG316 Cable Electrical Characteristics

Impedance	50 ± 3ohms	
Capacitance	95.8±3pF/m	
Conductor Resistance	302 ohms/KM at 20°C (max.)	
Operating Temperature	-55~ 200°C	
Velocity of propagation	69%	
Max Frequency	3GHz	
Maximum Attenuation(dB/M) @ 	1GHz	1.25
	1.8GHz	1.51
	2.4GHz	1.71
	3GHz	1.92

整條 Assembly 之 Loss 為以下 3 項數值之加總

1. 接頭 Loss : 0.06 x $\sqrt{\text{頻率}}$ (2 端都有接頭則需將此數值 x2)
2. 組裝 Loss : 0.12 (2 端都有組裝則需將此數值 x2)
3. 線材 Loss : 依上述 Maximum Attenuation 換算需求長度之 Loss

Specifications:

Electrical:

Frequency:DC-3GHz

Return Loss:14dB(Min.)



Material:

1.BNC Connector:

Center Pin:Brass/Gold

Insulator:Teflon

Body:Brass/Nickel

2.Cable:

RG316 Cable

Jacket Color:Brown

3.SMA Connector:

Center Pin:Brass/Gold

Insulator:Teflon

Body:Brass/Gold



5.Sleeve:


Color:Black

6.Heat Shrink Tube:

Color:Yellow

100cm Test Report:

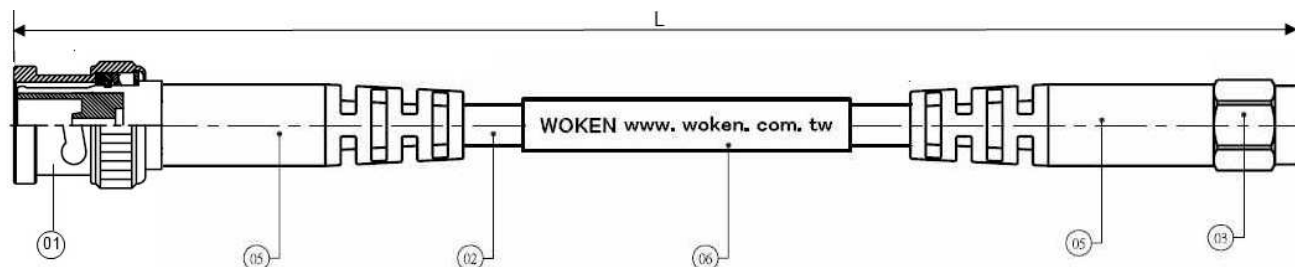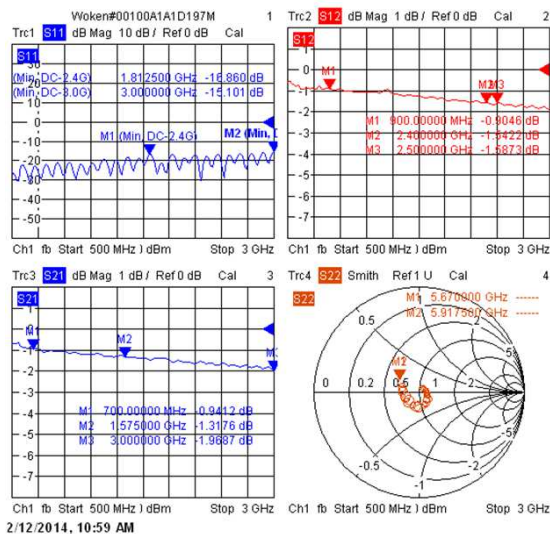

General Tolerance				  Woken Technology Inc.	
0.5~10mm				CODE	
11~100mm		±0.2			
101~500mm		±5.0		DWG TITLE	
501~1000mm		±10.0			
1001~2000mm		±15.0		SMA(M)-BNC(M) for	
2000~5000mm		±20.0			
		±50.0		RG316 Cable Assembly	
UNLESS OTHERWISE SPECIFIED					
THIRD ANGLE PROJECTION		DRAWN		Terence	08/03/13'
		ENGR		Jack	08/03/13'
		APVD		James	08/03/13'
				SIZE	A4
				REV	B
				DWG NO.	
				00100A1A1D1XXX	