




00100A1F5D1017

Cable Assembly

**4GHz BNC(M)–Stainless SMA(M)
for 100cm SS402 Cable
Assembly/Adhesive shrink tube**

Features

- ✓ High Repeatability
- ✓ Low VSWR




Test Report

Electrical Specifications

Frequency	DC-4GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection 1	BNC Male
Connection 2	SMA Male

Material

Part	Material	Plated
1.SMA Connector		
Body	Stainless Steel	
Center Pin	Brass	Gold
Insulator	Teflon	
2.Cable		
SS402 Coaxial Cable		Blue
3.Heat Shrink Tube		
		Black
4.BNC Connector		
Body	Brass	Nickel
Center Pin	Brass	Gold
Insulator	Teflon	
5.Heat Shrink Tube		
		Yellow

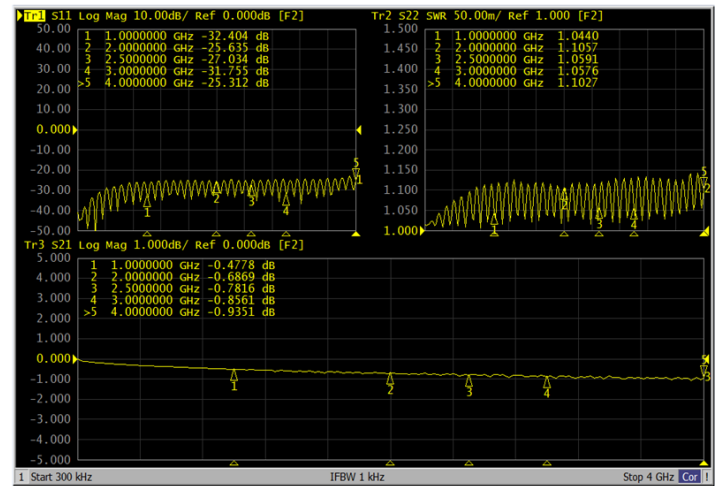


Mechanical

Durability	500 Cycles
------------	------------

Outling Drawing (Unit:mm)

DIMENSIONS	TOLERANCES
0.5~10mm	±0.2
11~100mm	±5.0
101~500mm	±10.0
501~1000mm	±15.0
1001~2000mm	±20.0
2000~5000mm	±50.0

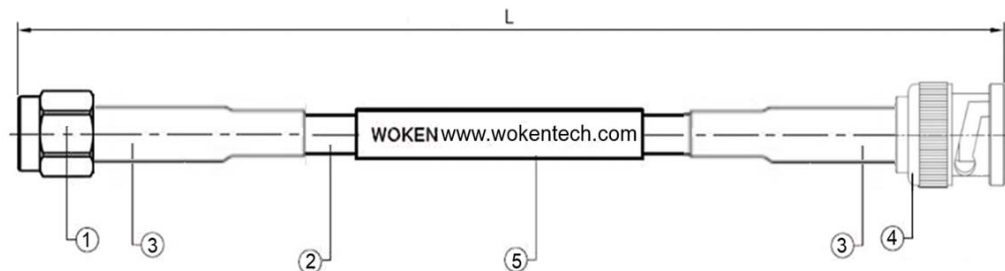




Wake up your further dream.



SS402 Spiral Shielding Coaxial Cable Physical Characteristics

Center Conductor	0.92±0.02mm SPC
Dielectric Diameter	3.00±0.05mm PTFE
Outer Conductor	3.20±0.05mm SPCF
Outer Shield	3.55±0.10mm SPCS
Jacket	4.10±0.10mm FEP
Minimum Bend Radius Static	12.7mm
Minimum Bend Radius Dynamic	40mm

SS402 Spiral Shielding Coaxial Cable Electrical Characteristics

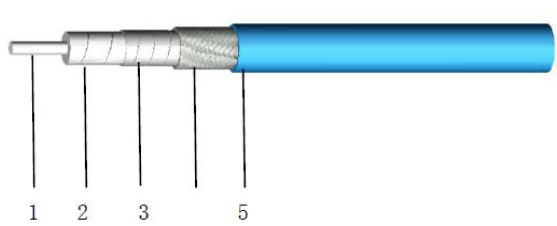Impedance	50 ± 2ohms		
Capacitance	96.1 pF/m (nom.)		
Max. Operating Frequency	40GHz		
Shielding Effect	100 dB(Min.)		
Operating Temperature	-55~ 165°C		
Velocity of propagation	70%		
	Frequency	Typical Attenuation(dB/m)	Power (Watts CW)
	0.5GHz	0.26	512
	1GHz	0.38	351
	3GHz	0.71	188
	6GHz	1.08	125
	8GHz	1.28	104
	10GHz	1.48	91
	12GHz	1.66	81
	18GHz	2.16	62
	26.5GHz	2.81	48
	40GHz	3.74	36

整條 Assembly 之 Loss 為以下 3 項數值之加總

1. 接頭 Loss : 0.06 x $\sqrt{\text{頻率}}$ (2 端都有接頭則需將此數值 x2)
2. 組裝 Loss : 0.12 (2 端都有組裝則需將此數值 x2)
3. 線材 Loss : 依上述 Maximum Attenuation 換算需求長度之 Loss
4. 晃動測試公差: I/L +/-0.2dB