




RG316DS Cable Physical Characteristics

Center Conductor	Construction Size	0.175mm
	Standard Diameter	0.53mm Silver Coated Copper Clad Steel
Insulation	Average Thickness	0.51mm
	Diameter	1.53±0.03mm FEP
1 st Braid Shield	Construction	16/5/0.10 mm
	Coverage	95%
	Diameter	1.98±0.05mm Silver Coated Copper
2nd Braid Shield	Construction	16/5/0.10 mm
	Coverage	86%
	Diameter	2.38±0.05mm Silver Coated Copper
Jacket	Average Thickness	0.30mm
	Overall Diameter	2.90±0.10mm FEP(Brown)

RG316DS Cable Electrical Characteristics

Impedance	50 ± 3ohms			
Capacitance	95.8±3pF/m			
Conductor Resistance	120.6 ohms/KM at 20°C (max.)			
Operating Temperature	-55~ 200°C			
Velocity of propagation	69%			
Max Frequency	12GHz			
Maximum Attenuation(dB/M) @ 	Freq.	Att.	Freq.	Att.
	2GHz	1.4	7GHz	2.6
	2.4GHz	1.5	8GHz	2.82
	3GHz	1.6	9GHz	3.0
	4GHz	1.95	10GHz	3.2
	5GHz	2.2	11GHz	3.36
	6GHz	2.7	12GHz	3.6

整條 Assembly 之 Loss 為以下 3 項數值之加總

1. 接頭 Loss : 0.06 x $\sqrt{\text{頻率}}$ (2 端都有接頭則需將此數值 x2)
2. 組裝 Loss : 0.12 (2 端都有組裝則需將此數值 x2)
3. 線材 Loss : 依上述 Maximum Attenuation 換算需求長度之 Loss

Specifications:

Electrical:

Frequency:DC-6GHz

VSWR:1.3:1(Max.)

Material:

1.SMA Connector:

Center Pin:Phosphor Bronze/Gold

Insulator:Teflon

Body:Brass/Gold

2.Cable:

RG316DS Cable

Jacket Color:Brown

3.MMCX Connector:

Center Pin:Brass/Gold

Insulator:Teflon

Body:Brass/Gold

4.Heat Shrink Tube:


Color:Black

5.Sleeve:


Color:Black

6.Heat Shrink Tube:

Color:Yellow

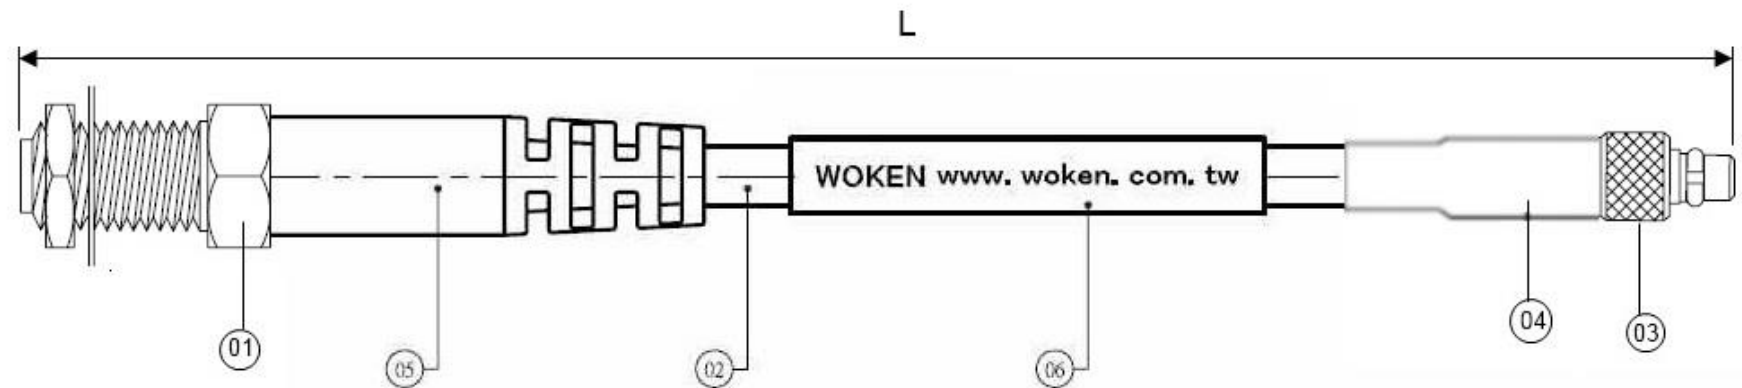

10cm Test Report

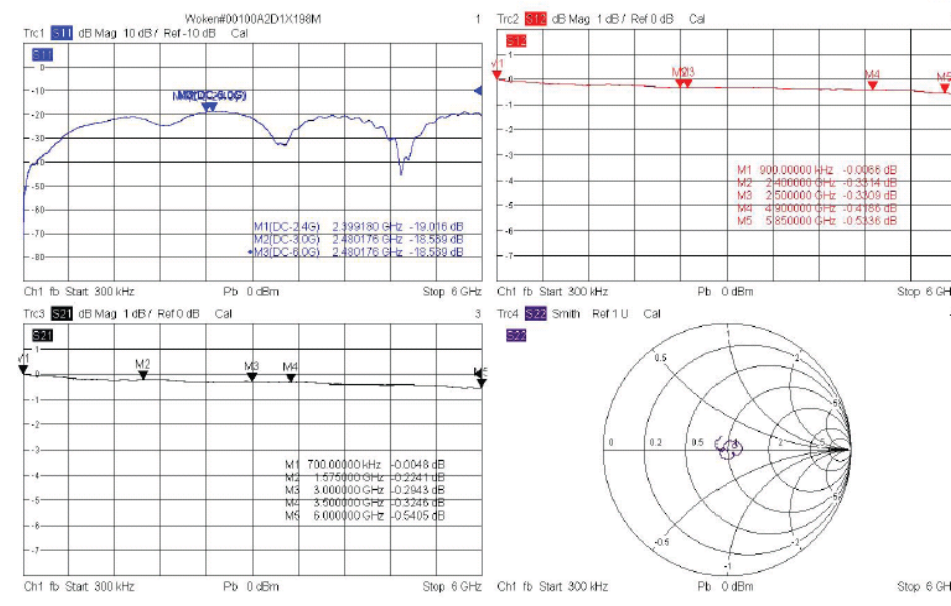


General Tolerance

0.5~10mm	±0.2
11~100mm	±5.0
101~500mm	±10.0
501~1000mm	±15.0
1001~2000mm	±20.0
2000~5000mm	±50.0

UNLESS OTHERWISE SPECIFIED

THIRD ANGLE PROJECTION



DRAWN	Terence	08/03/10'
ENGR	Jack	08/03/10'
APVD	James	08/03/10'



Woken Technology Inc.

CODE

DWG TITLE

MMCX(M)-SMA(F) Bulkhead for
RG316DS Cable Assembly

SIZE

A4

REV

A

DWG NO.

00100A2D1X1XXX