



00100B1A1D202M

Cable Assembly

3GHz BNC(F)B.H-SMB(P) for 60cm
RG316 Cable Assembly/adhesive
shrink tube

Features

- ✓ High Repeatability
- ✓ Low VSWR




Test Report

Electrical Specifications

Frequency	DC-3GHz
VSWR	1.5:1(Max.)
Impedance	50Ohm
Connection 1	BNC Female Bulkhead
Connection 2	SMB Plug

Material

Part	Material	Plated
1.SMB Connector		
Body	Brass	Gold
Center Pin	Beryllim Copper	Gold
Insulator	Teflon	
2.Cable		
RG316 Coaxial Cable		Brown
3.BNC Connector		
Body	Brass	Nickel
Center Contact	Beryllium Copper	Gold
Insulator	Teflon	
4.Adhesive Shrink Tube		
		Black
5.Heat Shrink Tube		
		Yellow

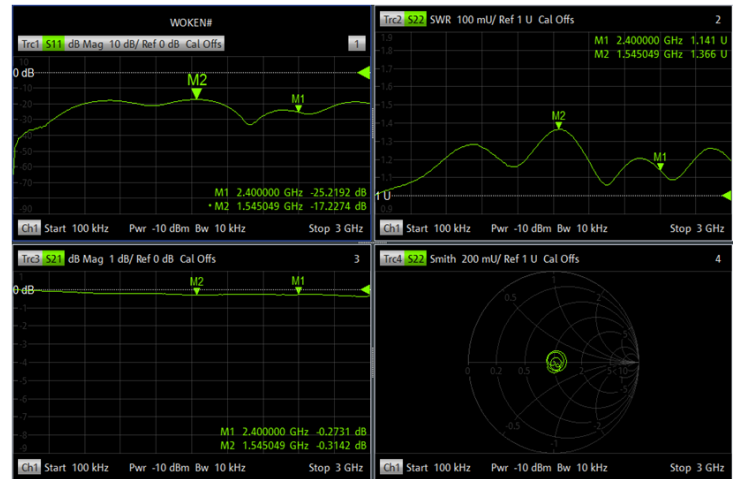


Mechanical

Durability	500 Cycles
------------	------------

Outling Drawing (Unit:mm)

DIMENSIONS	TOLERANCES
0.5~10mm	±0.2
11~100mm	±5.0
101~500mm	±10.0
501~1000mm	±15.0
1001~2000mm	±20.0
2000~5000mm	±50.0

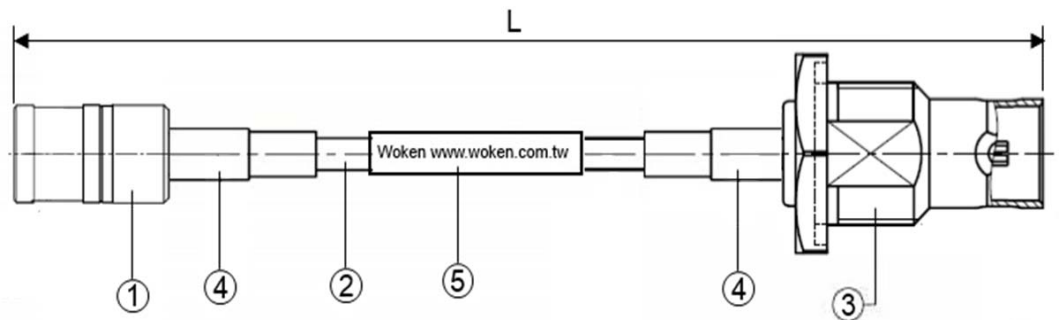




Wake up your further dream.



RG316 Cable Physical Characteristics

Center Conductor	Construction Size	0.175mm
	Standard Diameter	0.53mm Silver Coated Copper Clad Steel
Insulation	Average Thickness	0.51mm
	Diameter	1.53±0.03mm FEP
Braid Shield	Construction	16/5/0.10 mm
	Coverage	95%
	Diameter	1.98±0.05mm Silver Coated Copper
Jacket	Average Thickness	0.30mm
	Overall Diameter	2.53±0.10mm FEP(Brown)
Min. Bending Radius	12.7mm	

RG316 Cable Electrical Characteristics

Impedance	50 ± 3ohms	
Capacitance	95.8±3pF/m	
Conductor Resistance	302 ohms/KM at 20°C (max.)	
Operating Temperature	-55~ 200°C	
Velocity of propagation	69%	
Max Frequency	3GHz	
 Maximum Attenuation(dB/M) @	1GHz	1.25
	1.8GHz	1.51
	2.4GHz	1.71
	3GHz	1.92

整條 Assembly 之 Loss 為以下 3 項數值之加總

1. 接頭 Loss : 0.06 x $\sqrt{\text{頻率}}$ (2 端都有接頭則需將此數值 x2)
2. 組裝 Loss : 0.12 (2 端都有組裝則需將此數值 x2)
3. 線材 Loss : 依上述 Maximum Attenuation 換算需求長度之 Loss