

Features:

High Repeatability



Specifications:

Electrical:

Frequency:DC-12.4GHz

Impedance: 50Ohm

VSWR:1.3:1(Max.)

Connection:SMA Female

Working voltage: 500 Vrms Max.

Dielectric withstanding voltage: 1000 Vrms Max.

Insulator resistance: 5000M ohm Min.




Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -65°C~155°C

Unit:mm

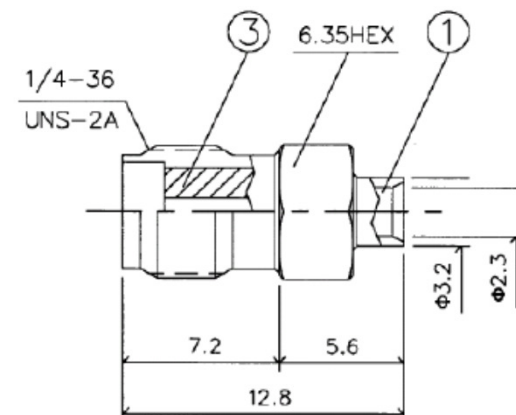

Material:

Part	Material	Plated
Body	Brass	Golden Flash
Center Contact	BeCu	Gold 20u"
Insulator	Teflon	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

11/30/12'

11/30/12'

11/30/12'



Woken Technology Inc.

CODE

DWG TITLE

SIZE

A4

REV

B

12.4GHz SMA(F)180°,G,for
RG405 Direct Solder Connector

DWG NO.

00200CA2GEG01L