

Features:

High Repeatability
Low VSWR



Specifications:

Electrical:

Frequency:DC-12.4GHz
VSWR:1.3:1(Max.)
Impedance: 50Ohm
Connection: SMA Female



Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -65°C~155°C

Unit:mm

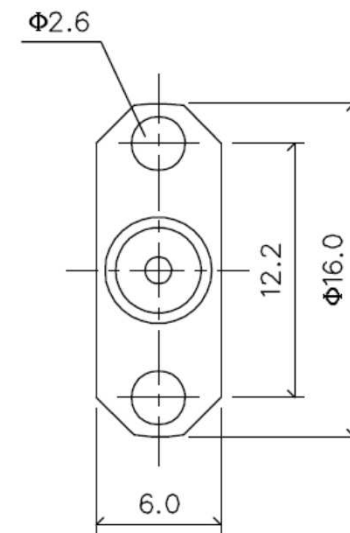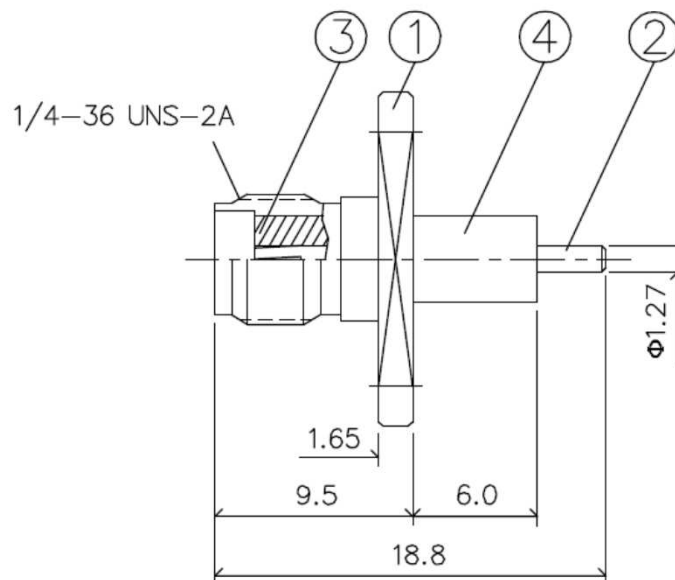

Material:

Part	Material	Plated
Body	Brass	Gold
Center Contact	BeCu	Gold
Insulator	Teflon	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:


INTEGRAL DIMENSIONS ± TOLINT

x	±0.38	.xx	±0.15
.x	±0.25	.xx x	±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN	Terence	11/30/12'
ENGR	Jack	11/30/12'
APVD	James	11/30/12'



Woken Technology Inc.

CODE	DWG TITLE
	12.4GHz SMA(F)180°
SIZE	Flange Connector
A4	
REV	DWG NO.
B	00200CA2GF320L