

Features:

High Repeatability



Unit:mm

Specifications:

Electrical:

Frequency:DC-6GHz

Impedance: 50Ohm

VSWR:1.3:1(Max.)



Connection:2Hole SMA Female

Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -65°C~155°C

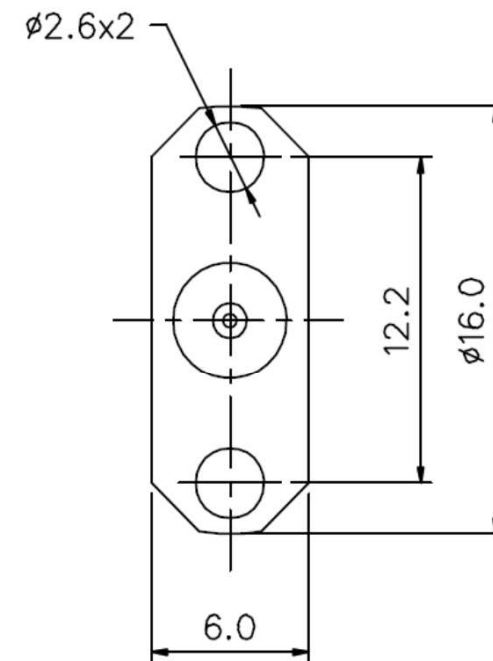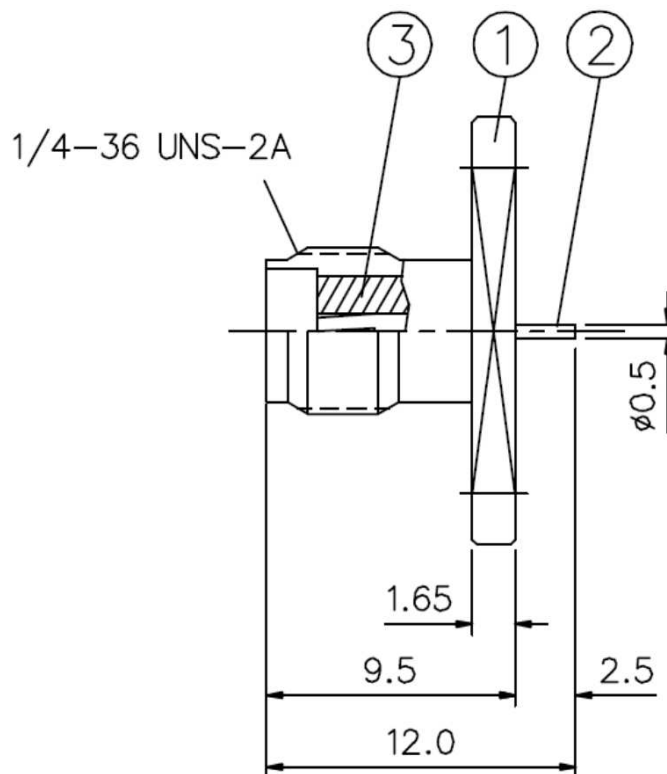

Material:

Part	Material	Plated
Body	Brass	Gold
Center Contact	BeCu	Gold
Insulator	Teflon	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:


INTEGRAL DIMENSIONS ±TOLINT

x	±0.38	.xx	±0.15
.x	±0.25	.xx x	±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN	Terence	11/30/14'
ENGR	Jack	11/30/14'
APVD	James	11/30/14'



Woken Technology Inc.

CODE	DWG TITLE
	6GHz SMA(F)180° Flange Connector(Pin:0.5mm)
SIZE	DWG NO.
A4	00200CA2GF389L
REV	
A	