

Features:

High Repeatability
Low VSWR



Specifications:

Electrical:


Frequency:DC-12.4GHz
Impedance: 50Ohm
Connection: SMA Female

Mechanical:


Durability:500 Cycles

Environmental:

Temperature: -65°C~155°C

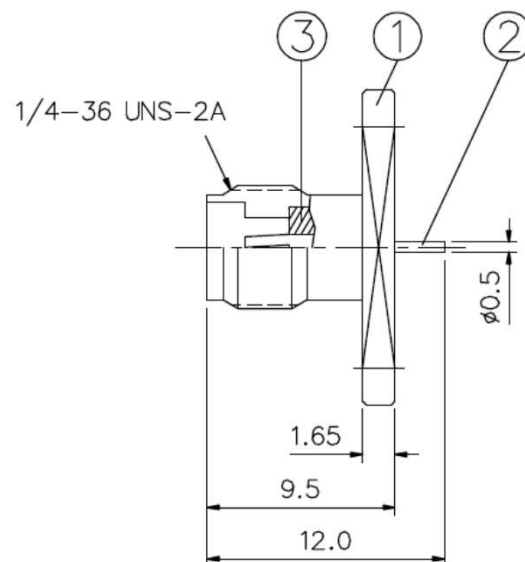

Unit:mm

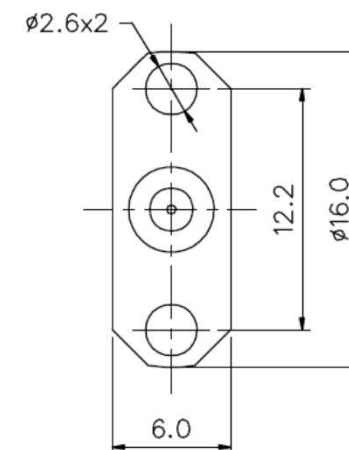

Material:


Part	Material	Plated
Body	Brass	Gold
Center Contact	BeCu	Gold
Insulator	Teflon	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT

x	±0.38	.xx	±0.15
.x	±0.25	.xx x	±0.05

THIRD ANGLE PROJECTION



ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

DRAWN	Terence	05/10/13'
ENGR	Jack	05/10/13'
APVD	James	05/10/13'



Woken Technology Inc.

CODE	DWG TITLE
	12.4GHz SMA(F)180° Flange Connector(Pin:0.5mm)
SIZE	DWG NO.
A4	00200CA2GF390L
REV	E