

Features:

High Repeatability



Specifications:

Electrical:

Frequency:DC-12.4GHz

Impedance: 50Ohm

VSWR:1.3:1(Max.)

Connection:SMA Female

Woking voltage: 375 Vrms Max.

Deilectric withstanding voltage: 750 Vrms Max.


Insulator resitance: 5000M ohm Min.

Mechanical:


Durability:500 Cycles

Environmental:

Temperature: -65°C~155°C

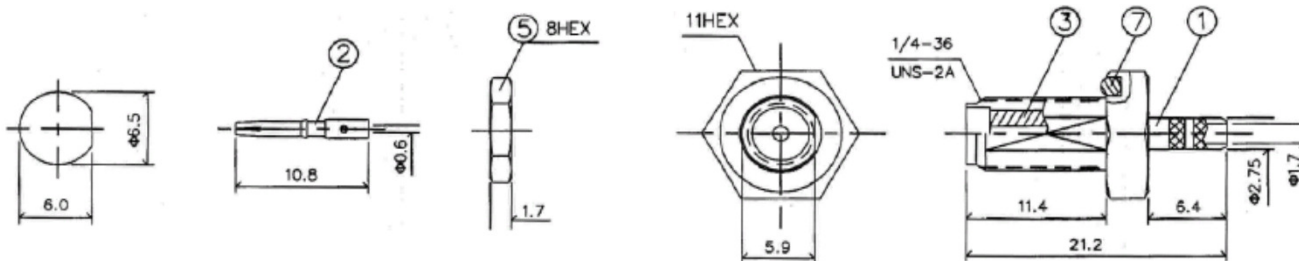

Unit:mm

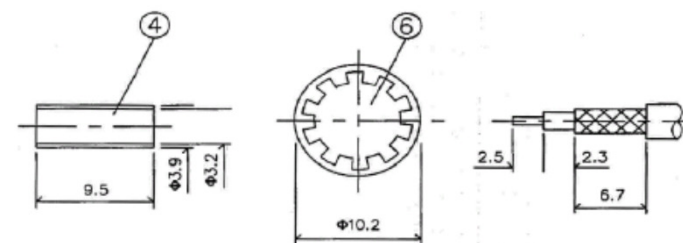

Material:

Part	Material	Plated
Gasket	Silicon	
Body	Brass	Golden Flash
Center Contact	BeCu	Gold 20u"
Insulator	Teflon	


UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT

x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

THIRD ANGLE PROJECTION



ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

DRAWN Terence

11/30/12'

ENGR Jack

11/30/12'

APVD James

11/30/12'



Woken Technology Inc.

CODE

DWG TITLE

SIZE

A4

REV

B

12.4GHz SMA(F)180°G, with O-ring for

RG174,316,188 Crimp Connector

DWG NO.

00200CA2GHA02L