



00200CA2GP901W

Connector

12.4GHz SMA(F)180°B,G,End Launch
PCB Connector/PCB
Thickness:1.73mm/L:17.5mm

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-12.4GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection	SMA Female


Mechanical

Durability	500 Cycles
------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	PTFE	
Nut	Brass	Gold
Washer	Brass	Gold

Outling Drawing (Unit:mm) Tolerance: .X:±0.2, .XX:±0.1 .XXX:±0.05

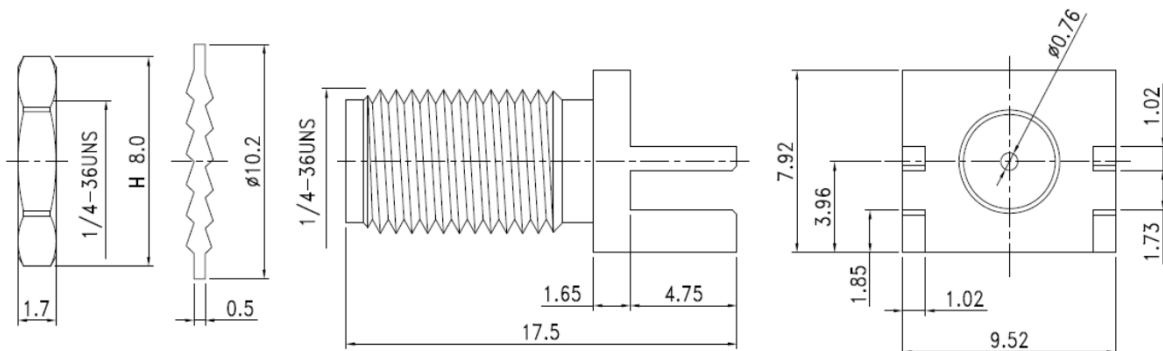

All Specification Changed Without Notification.