

4

3

2

1

Features:

High Repeatability



Unit:mm

Specifications:**Electrical:**

Frequency:DC-12.4GHz

Impedance: 50Ohm

VSWR:1.3:1(Max.)






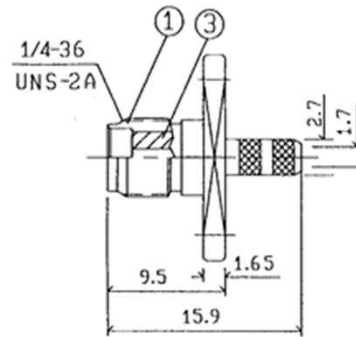
Connection:SMA Female

Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -65°C~155°C

**Material:**

Part	Material	Plated
Ferrule	Brass	Tri-Metal
Body	Brass	Tri-Metal
Center Pin	Brass	Gold
Insulator	Teflon	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

11/30/12'

11/30/12'

11/30/12'



Woken Technology Inc.

CODE

SIZE

A4

REV

B

DWG TITLE

12.4GHz SMA(F)180°,T, for

RG174,316 4Hloe Flange Crimp Connector

DWG NO.

00200CA2XNA01L

4

3

2

1