Rev:A

00200CA5GCG01L

Connector

6GHz Reverse SMA(F)180°B.H.,G,for RG405,SS405 Crimp Connector

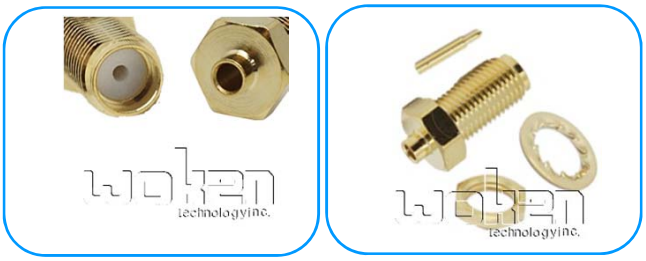

Features

- High Repeatability
- Low VSWR

Electrical Specifications

Frequency	DC-6GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection	Reverser SMA Female Bulkhead

Mechanical

Durability	500 Cycles
Mating	1/4-36 Thread coupling
Mating Torque	Recommended:80-110N.cm
	Max.:170N.cm

Environmental

Operating Temperature	-65℃~155℃
Vibration	MIL-STD-202 Meth.204
Corrosion	MIL-STD-202 Meth.101(5% salt solution)

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Brass	Gold
Insulator	Teflon	
Nut	Brass	Gold
Washer	Brass	Gold
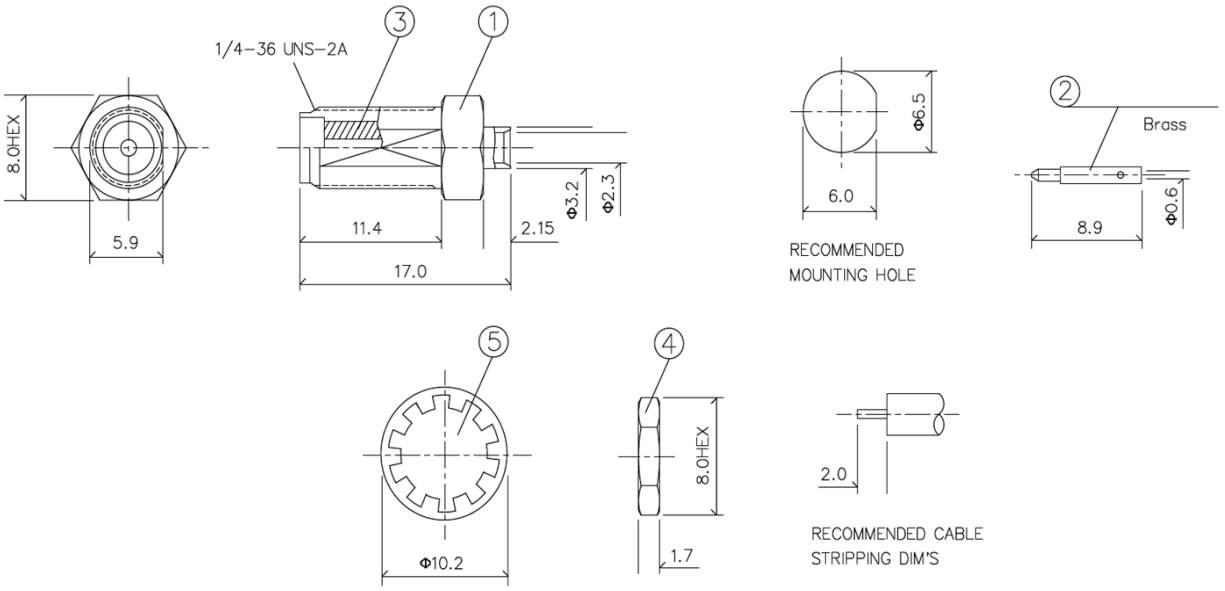
Outling Drawing (Unit:mm)