

Features:

High Repeatability
Low VSWR



Specifications:

Electrical:

Frequency:DC-12.4GHz
Impedance: 50Ohm
Connection: SMA Female



Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -65°C~155°C

Unit:mm

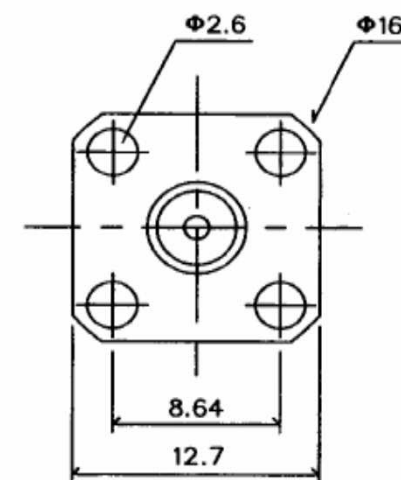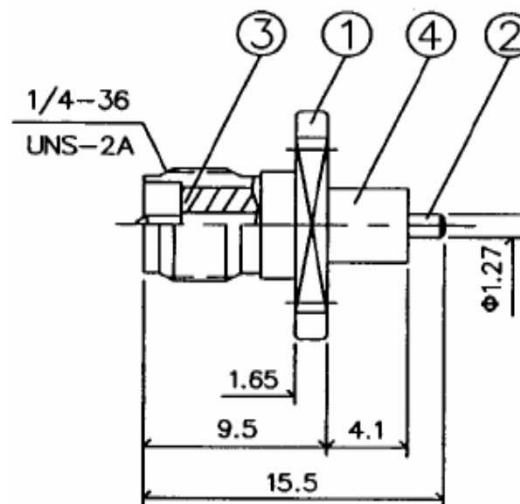

Material:

Part	Material	Plated
Body	Brass	Golden Flash
Center Contact	Brass	Gold 20u"
Insulator	Teflon	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN	Terence	11/30/12'
ENGR	Jack	11/30/12'
APVD	James	11/30/12'



Woken Technology Inc.

CODE	DWG TITLE
	12.4GHz Reverse SMA(F)180°
SIZE	Flange Connector
A4	
REV	DWG NO.
B	00200CA2GF301L