

4

3

2

1

Features:

High Repeatability
Low VSWR

**Specifications:****Electrical:**

Frequency:DC-12.4GHz

Impedance: 50Ohm

Connection: Reverse SMA Female

Woking voltage:375 Vrms Max.

Deilectric withstanding voltage: 750 Vrms Min.

Insulator resitance: 5000M ohm Min.





VSWR:1.3:1(Max.)

Mechanical:




Durability:500 Cycles

Environmental:

Temperature: -65°C~155°C

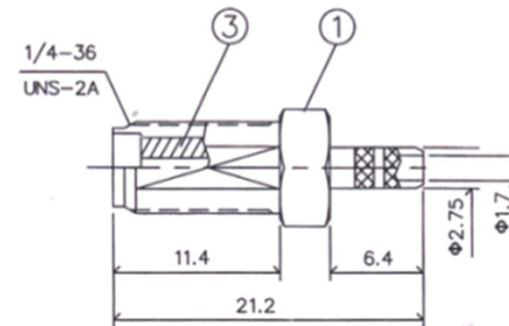

Unit:mm

**Material:**

Part	Material	Plated
Body	Brass	Golden Flash
Center Contact	Brass	Gold 20u"
Insulator	Teflon	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN Terence

11/30/12'

ENGR Jack

11/30/12'

APVD James

11/30/12'



Woken Technology Inc.

CODE

DWG TITLE

12.4GHz Reverse SMA(F)180°,G,
for RG174,316,188 Crimp Connector

SIZE
A4

REV

B

DWG NO.

00200CA5GHA01L

4

3

2

1