

4

3

2

1

Features:

High Repeatability

Low VSWR

**Specifications:****Electrical:**

Frequency:DC-12.4GHz

Impedance: 50Ohm

Connection: Reverse SMA Female


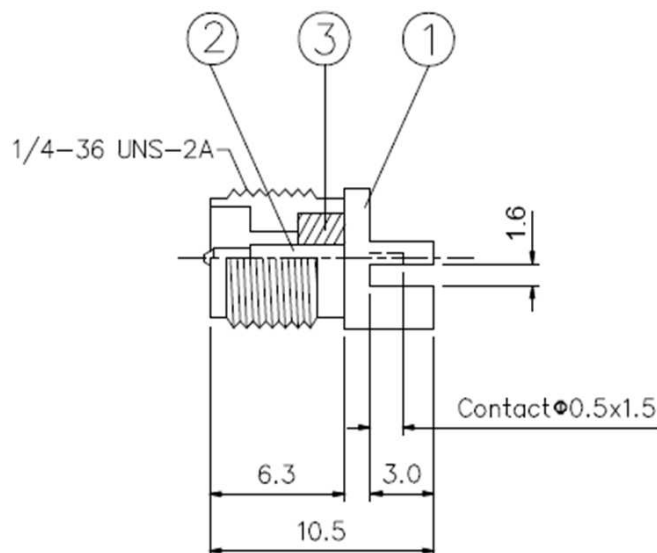
Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -65℃~155℃

Unit:mm

**Material:**

Part	Material	Plated
Body	Brass	Gold
Center Contact	Brass	Gold
Insulator	Teflon	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN Terence

08/02/07

ENGR Jack

08/02/07

APVD James

08/02/07



Woken Technology Inc.

CODE

DWG TITLE

12.4GHz Reverse SMA(F)180° ,End Launch

SIZE

PCB Connector/PCB Thickness:1.6mm

REV

DWG NO.

00200CA5GP901L

4

3

2

1