

Features:

High Repeatability



Specifications:

Electrical:

Frequency:DC-12.4GHz

Impedance: 50Ohm

Connection:SMA Female




Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -65°C~155°C

Unit:mm

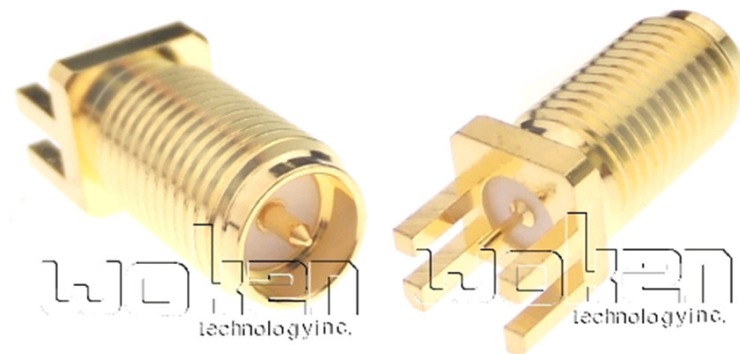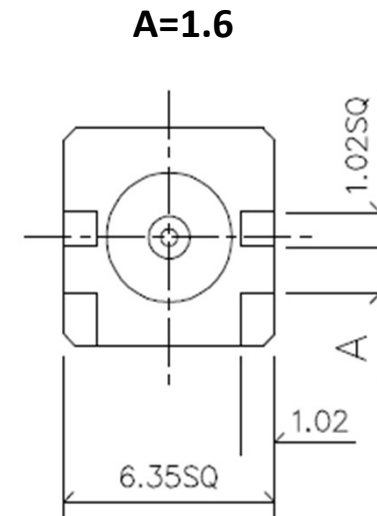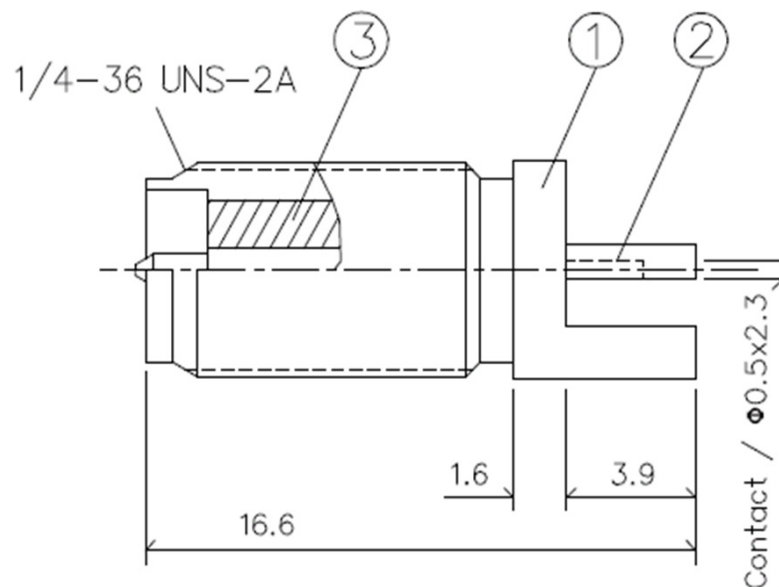

Material:

Part	Material	Plated
Body	Brass	Gold
Center Contact	BeCu	Gold
Insulator	Teflon	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

05/02/12'

05/02/12'

05/02/12'



Woken Technology Inc.

CODE

DWG TITLE

SIZE

A4

REV

B

12.4GHz Reverse SMA(F)180°,G,Edge Type

PCB Connector/PCB Thickness:1.6mm

DWG NO.

00200CA5GP905L