Rev:C

00200CA7GPR01L

Connector

12.4GHz Reverse SMA(F)90°,G,Receptacle PCB Connector



Features

- High Repeatability
- Low VSWR

Electrical Specifications

Frequency	DC-12.4GHz
VSWR	1.5:1(Max.)
Impedance	50Ohm
Connection	SMA Female

Mechanical

Durability	500 Cycles
Mating	1/4-36 Thread coupling
Mating Torque	Recommended:80-110N.cm
	Max.:170N.cm

Environmental

Operating Temperature	-65℃~155℃
Vibration	MIL-STD-202 Meth.204
Corrosion	MIL-STD-202 Meth.101(5% salt solution)

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Brass	Gold
Insulator	Teflon	
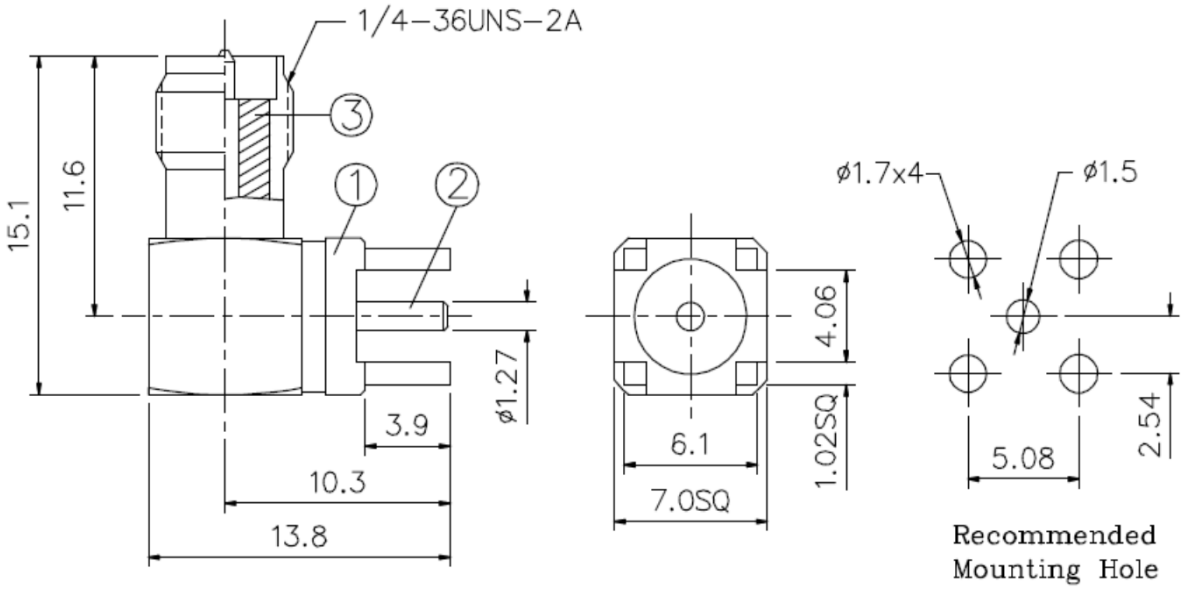
Outling Drawing (Unit:mm)