



00200CA8GPR05L

Connector

18GHz SMA(F)90° ,G,Receptacle PCB
Connector/Pin:3.9mm

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-18GHz
VSWR	DC-12GHz:1.3:1(Max.) 12-18GHz:1.4:1(Max.)
Impedance	50Ohm
Connection	SMA Female Right Angle

Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------




Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	PTFE	

Mechanical

Durability	500 Cycles
------------	------------

Outling Drawing (Unit:mm) Tolerance:X=±0.2 ,X.X=±0.1, X.XX=±0.05

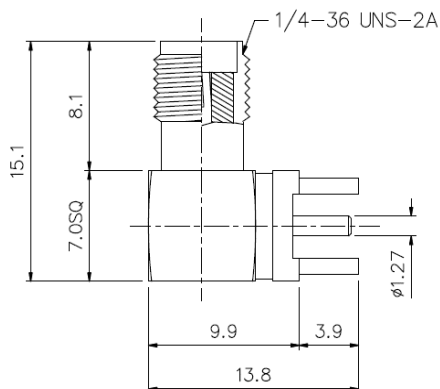

Recommended PCB Hole

All Specification Changed Without Notification.