Rev:A

00200CB1GCA01N

Connector

SMB(P)Quick 180° ,G,for RG316D Crimp Connector





Features

- High Repeatability
- Low VSWR

Electrical Specifications

Impedance	50Ohm
Connection	SMB Plug Quick

Environmental

Operating Temperature	-40℃~85℃

Material


Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
Ferrule	Brass	Gold

Mechanical

Durability	500 Cycles

Outling Drawing (Unit:mm) Tolerance:±0.1

A:Ø1.63mm, B:Ø2.7mm, C:Ø0.6mm, D:Ø4.5mm, E:Ø3.6mm, F: 0.151"

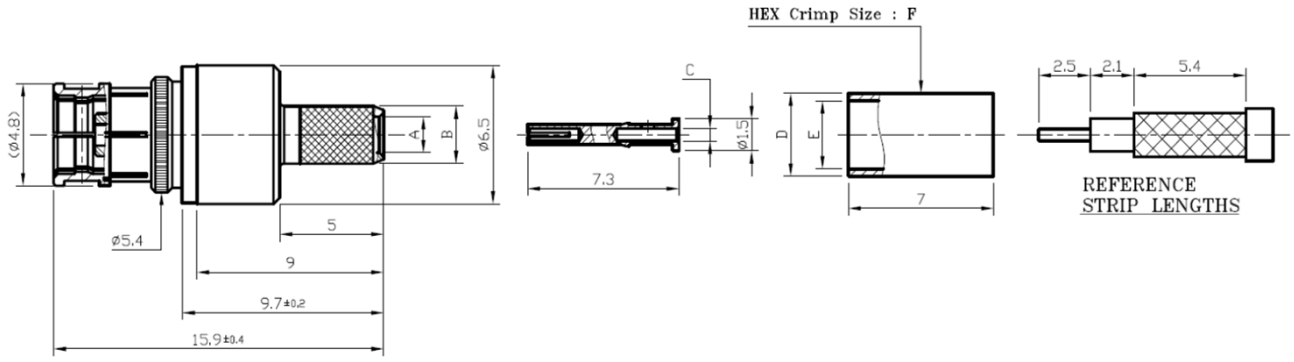

All Specification Changed Without Notification.