

4

3

2

1

Features:

High Repeatability

Low VSWR



Unit:mm

Specifications:**Electrical:**

Frequency:DC-4GHz


VSWR:1.5:1 Max.

Impedance: 50Ohm

Connection:SMB Jack

Environmental:


Temperature: -65°C~155°C

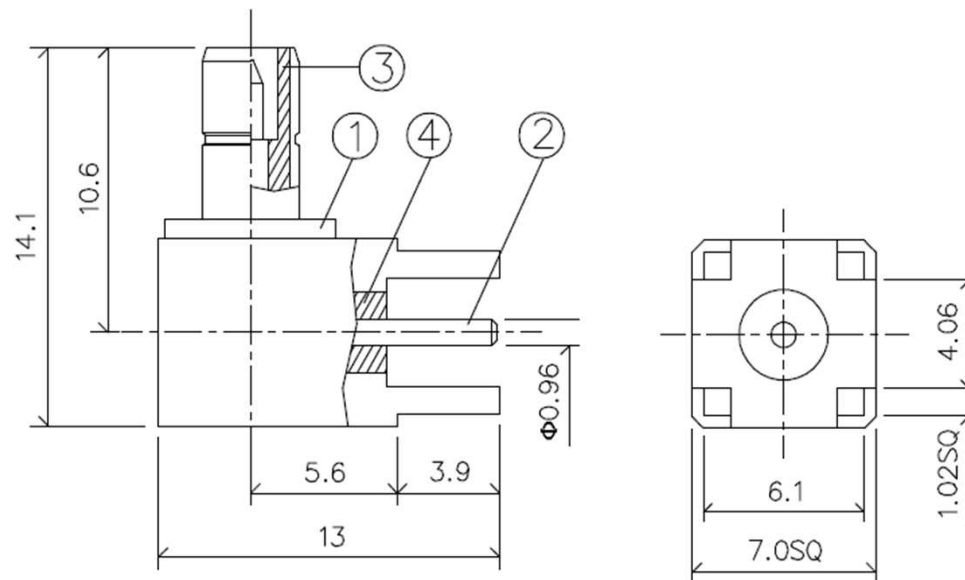**Material:**

Part	Material	Plated
Insulator	Teflon	
Center Pin	Brass	Gold
Body	Brass	Gold

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:INTEGRAL DIMENSIONS $\pm$ TOLINTx ± 0.38 .xx ± 0.15 .x ± 0.25 .xx x ± 0.05 ANGULAR DIMENSIONS $\pm$ TOLANGHOLES UNDER $\varnothing 5.0$ ± 0.05

THIRD ANGLE PROJECTION



DRAWN	Terence	05/02/13'
ENGR	Jack	05/02/13'
APVD	James	05/02/13'



Woken Technology Inc.

CODE

DWG TITLE

SMB(J)90° ,G,Receptacle PCB Connector

SIZE

A4

DWG NO.

00200CB8GPR01L

4

3

2

1