



00200CM1GCA01L

Connector

6GHz MCX(P)180°,G,for RG316
Crimp Connector

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-6GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection	MCX Plug

Environmental

Operating Temperature	-65°C~155°C
Vibration	MIL-STD-202 Meth.204
Corrosion	MIL-STD-202 Meth.101(5% salt solution)


Mechanical

Durability	500 Cycles
Engage force	2Kg(4.4lbs) Max.
Disengage force	0.85~2.54Kg(1.87~5.6lbs)

Material

Part	Material	Plated
Body	Beryllium Copper	Gold
Center Pin	Brass	Gold
Insulator	Teflon	
Body	Brass	Gold
Ferrule	Brass	Gold

Outling Drawing (Unit:mm) Tolerance:X=±0.2 ,X.X=±0.1, X.XX=±0.05

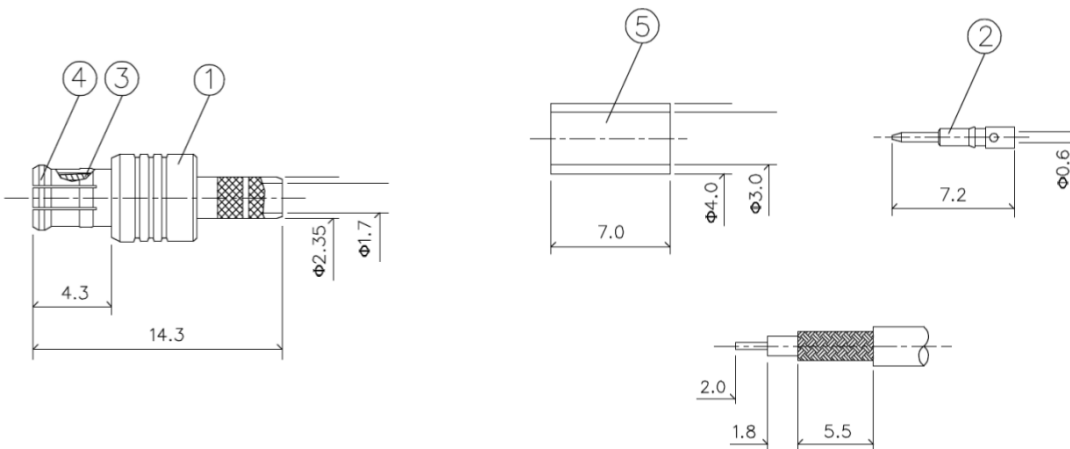

RECOMMENDED CABLE STRIPPING DIM'S

All Specification Changed Without Notification.