



00201CA2GCT99N

Connector

6GHz SMA(F)180°Bulkhead ,G, for
CFD200 Crimp Connector

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-6GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection	SMA Female

Material


Part	Material	Plated
Body	Brass	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Ferrule	Brass	Gold
Nut	Brass	Gold
Washer	Brass	Gold

Mechanical

Durability	500 Cycles
------------	------------

Outling Drawing (Unit:mm) Tolerance: ±0.1

A:Ø3.1,B:Ø4.5,C:Ø1.0,D:Ø6.5,E:Ø5.4,F:5.5

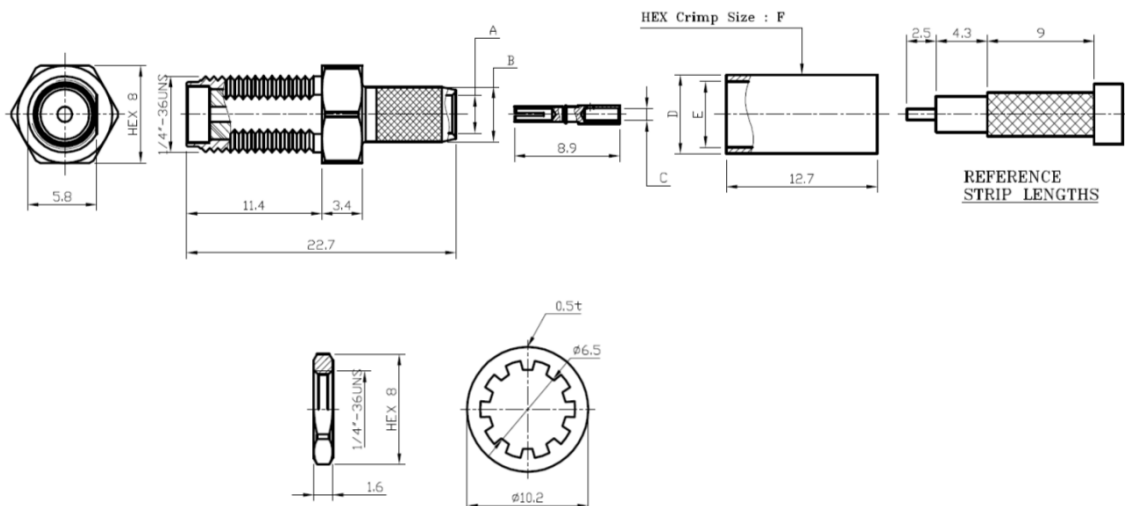

All Specification Changed Without Notification.