

Specifications:

Electrical:

Frequency:DC-18GHz

VSWR:1.3:1(Max.)

Impedance: 50Ohm







Connection: SMA Female

Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C

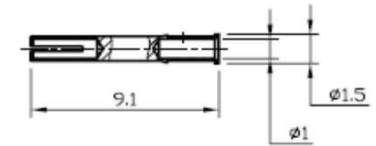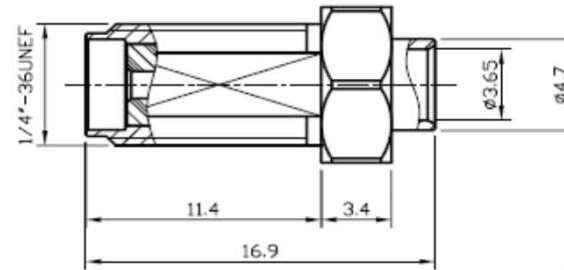

Unit:mm



Pho for Ref.

Material:

Part	Material	Plated
Body	Brass	Gold
Insulator	Teflon	
Center Pin	Phosphor Bronze	Gold
Washer	Brass	Gold
Nut	Brass	Gold

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:				Woken Technology Inc.	
INTEGRAL DIMENSIONS ± TOLINT		ANGULAR DIMENSIONS ±TOLANG		CODE	DWG TITLE
x	±0.38	.xx	±0.15		SMA(F)180°Bulkneed,G, for RG402,.141
.x	±0.25	.xx x	±0.05		Direct Solder Connector
THIRD ANGLE PROJECTION		DRAWN	Terence	SIZE	DWG NO.
		ENGR	Jack	A4	
		APVD	James	REV	00201CA2GEF99N
				B	