

4

3

2

1

Features:

High Repeatability

Unit:mm

**Specifications:****Electrical:**

Frequency:DC-6GHz

Impedance: 50Ohm

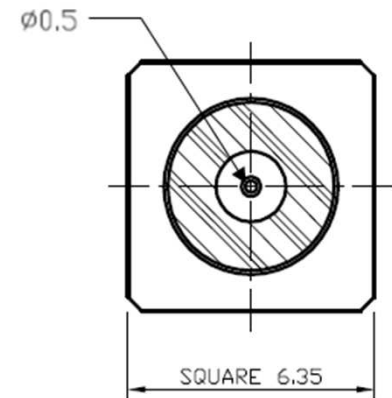
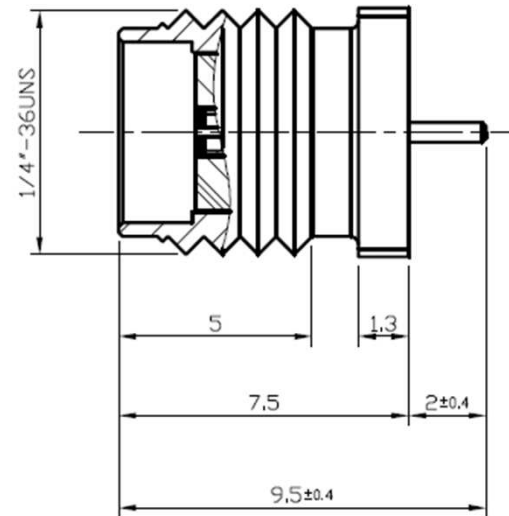
Connection:SMA Female

Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C

**Material:**

Part	Material	Plated
Body	Brass	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

09/19/14'

09/19/14'

09/19/14'



Woken Technology Inc.

CODE

SIZE
A4REV
A

DWG TITLE

6GHz SMA(F)180°,G,Press In PCB Connector

/Solder Attachment Pin Terminal:φ0.5mm

DWG NO.

00201CA2GPS16N

4

3

2

1