

4

3

2

1

Specifications:**Electrical:**

Frequency:DC-6GHz

VSWR:1.3:1(Max.)

Impedance: 50Ohm

Connection: Reverse SMA Female R/A

Mechanical:

Durability:500 Cycles

Environmental:


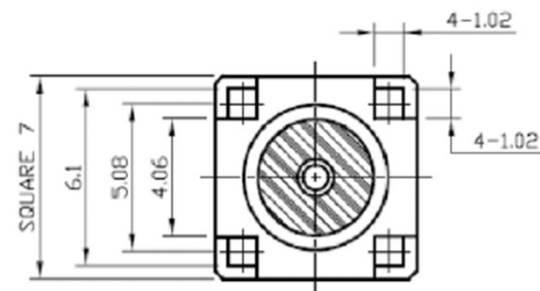
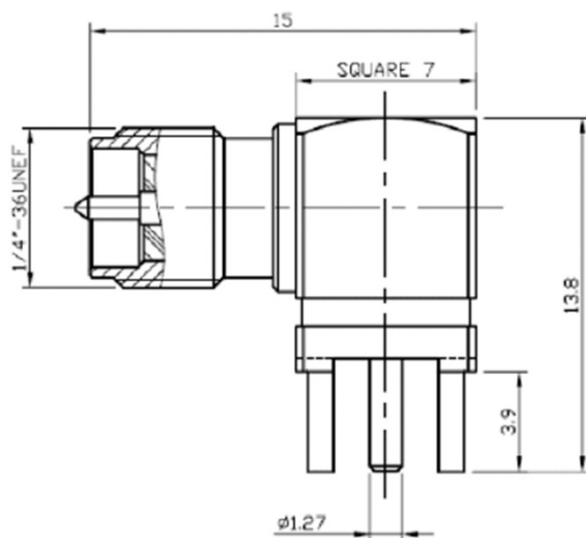
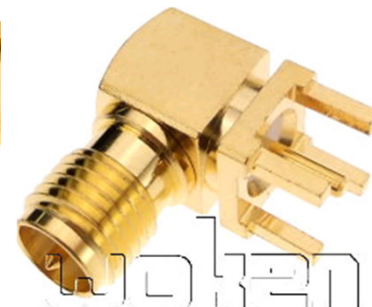
Temperature: -40°C~85°C

Vibration:MIL-STD-202 Meth.204

Corrosion:MIL-STD-202 Meth.101(5% salt solution)



Unit:mm

RECOMMENDED
MOUNTING HOLES

Material:

Part	Material	Plated
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Body	Brass	Gold

UNLESS OTHERWISE SPECIFIED ALL DIMENCIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN Terence

11/30/12'

ENGR Jack

11/30/12'

APVD James

11/30/12'



Woken Technology Inc.

CODE

DWG TITLE

Reverse SMA(F)90°,Receptacle

SIZE

PCB Connector/ Pin: 3.9mm

REV

DWG NO.

00201CA7GPR04N

4

3

2

1

D

C

B

A

D

C

B

A