

4

3

2

1

Specifications:**Electrical:**

Frequency:DC-6GHz

VSWR:1.5:1(Max.)

Impedance: 50Ohm

Connection: Reverse SMA Female R/A

Mechanical:

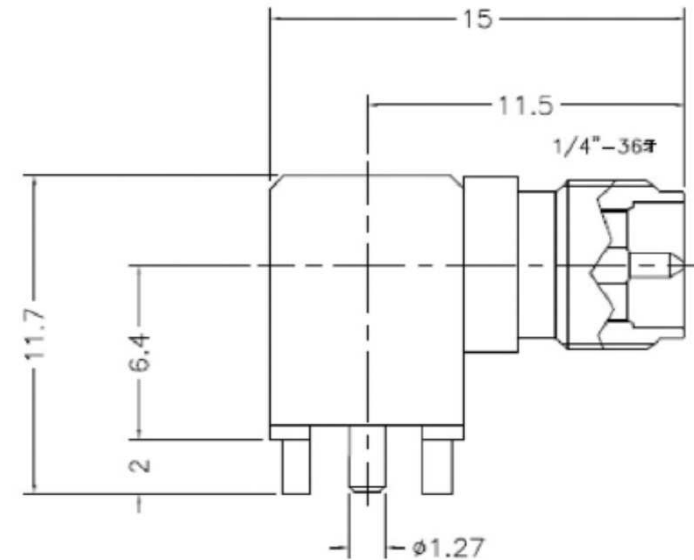
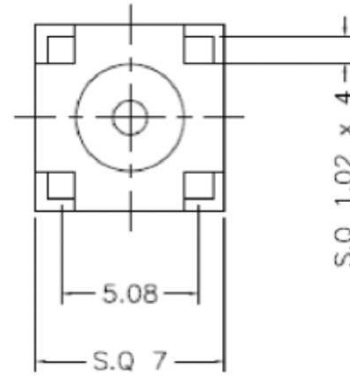
Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C



Unit:mm

**Material:**

Part	Material	Plated
Center Pin	Brass	Gold
Insulator	Teflon	
Body	Brass	Gold

UNLESS OTHERWISE SPECIFIED ALL DIMENCIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN Terence

11/30/12'

ENGR Jack

11/30/12'

APVD James

11/30/12'



Woken Technology Inc.

CODE

DWG TITLE

Reverse SMA(F)90° ,Receptacle

SIZE

A4

DWG NO.

00201CA7GPR10N

REV

B

4

3

2

1