

Rev:A

00201CF2MHL01G

Connector

F(F)180°B,N,for RG59,62 Crimp Connector





Features

- High Repeatability
- Low VSWR

Electrical Specifications

Impedance	75Ohm
Connection	F Female Bulkhead

Mechanical

Durability	500 Cycles

Environmental


Operating Temperature	-40℃~85℃

Material

Part	Material	Plated
Body	Brass	Nickel
Contact Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Ferrule	Brass	Nickel
Nut	Brass	Nickel
Washer	Brass	Nickel

Outling Drawing (Unit:mm)

DIMENSIONS	TOLERANCES
0.5~6mm	±0.2
6~30mm	±0.4
30~120mm	±0.6
120~315mm	±1.0
315~1000mm	±1.6
1000~2000mm	±2.4

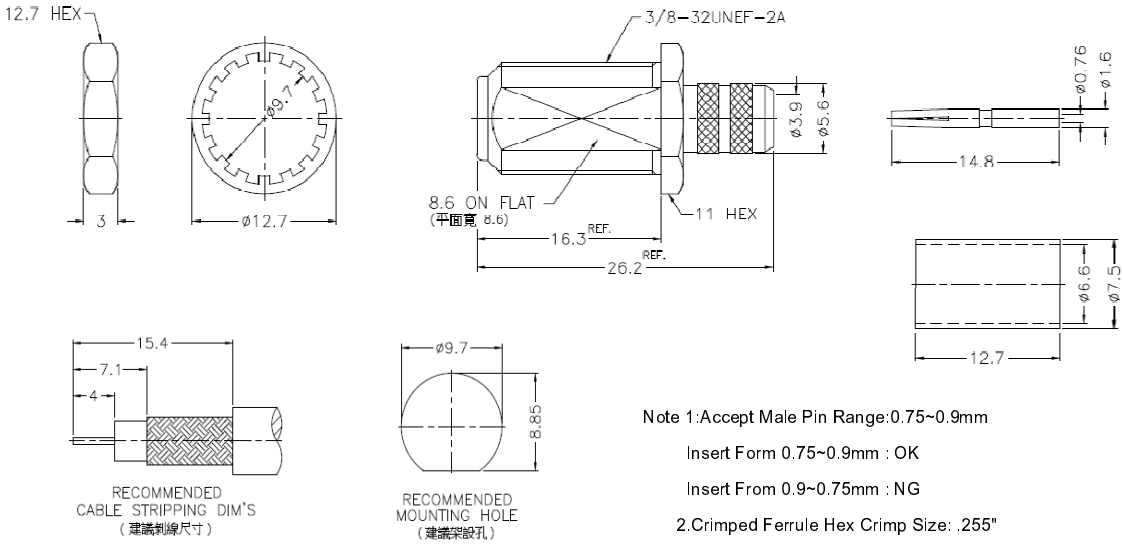

Note 1:Accept Male Pin Range:0.75~0.9mm

Insert Form 0.75~0.9mm : OK

Insert From 0.9~0.75mm : NG

2.Crimped Ferrule Hex Crimp Size: .255"