

4

3

2

1

Unit:mm

Specifications:**Electrical:**

Frequency:DC-6GHz

VSWR:1.3:1(Max.)

Impedance: 50Ohm

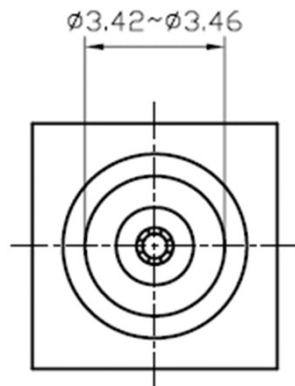

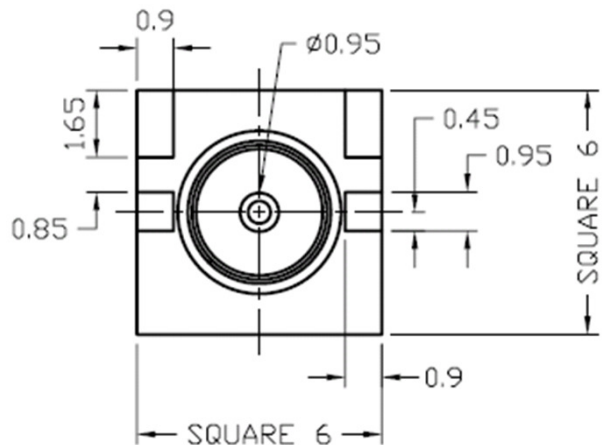
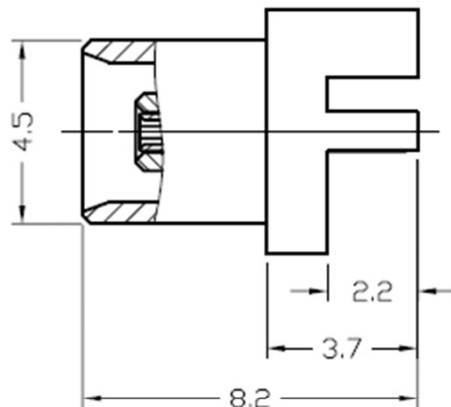
Connection: MCX Female

Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C

**Material:**

Part	Material	Plated
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	Gold
Body	Brass	Gold

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

Terence

05/07/13'

ENGR

Jack

05/07/13'

APVD

James

05/07/13'



Woken Technology Inc.

CODE

DWG TITLE

MCX(F)180° G, Receptacle

PCB Connector

SIZE

A4

REV

B

DWG NO.

00201CM2GPR99N

4

3

2

1