

4

3

2

1

Specifications:**Electrical:**

Frequency:DC-6GHz

VSWR:1.5:1(Max.)

Impedance: 50Ohm

Connection: N Male

Mechanical:

Durability:500 Cycles




Mating:5/8-24 Thread

Environmental:

Temperature: -40°C~85°C

Vibration:MIL-STD-202 Meth.204

Corrosion:MIL-STD-202 Meth.101(5% salt solution)

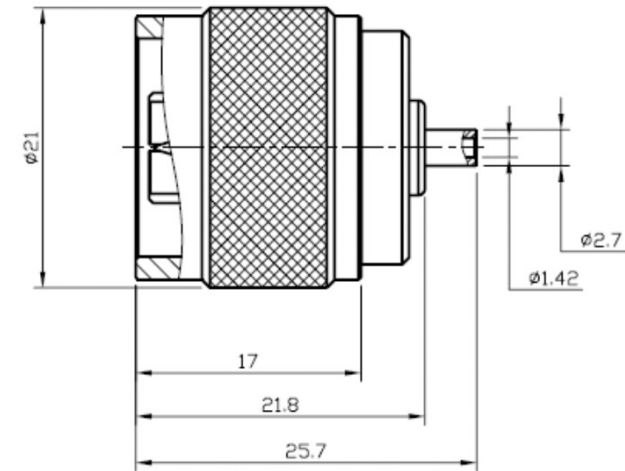

Unit:mm

Material:

Part	Material	Plated
Center Pin	Brass	Gold
Body	Brass	Nickel
Shell	Brass	Nickel
Gasket	Silicone	
Inner Retaining Ring	Brass	
Insulator	Teflon	
Center Contact	Beryllium Copper	Gold
Bullet Contact	Brass	Gold



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

05/30/13'

05/30/13'

05/30/13'



Woken Technology Inc.

CODE

DWG TITLE

N(M)180°, N, for RG178,196

SIZE

A4

Crimp Connector

REV

C

DWG NO.

00201CN1NCC99N

4

3

2

1