

4

3

2

1

Specifications:**Electrical:**

Frequency:DC-6GHz

VSWR:1.3:1(Max.)

Impedance: 50Ohm

Connection: N Male

Mechanical:

Durability:500 Cycles





Mating:5/8-24 Thread

Environmental:

Temperature: 40°C~85°C

Vibration:MIL-STD-202 Meth.204

Corrosion:MIL-STD-202 Meth.101(5% salt solution)

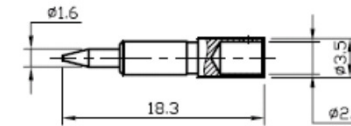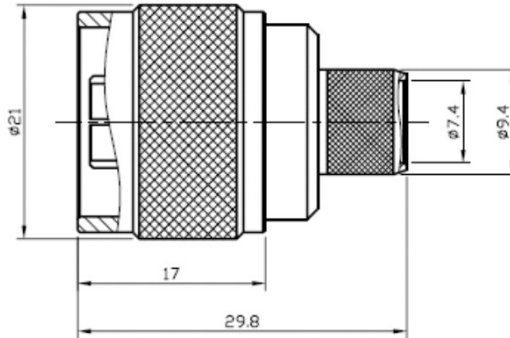

Unit:mm

**RECOMMENDED
STRIP LENGTHS****Material:**

Part	Material	Plated
Shell	Brass	Nickel
Gasket	Silicone	
Inner Retaining Ring	Brass	
Body	Brass	Nickel
Insulator	Teflon	
Center Pin	Brass	Gold
Ferrule	Brass	Nickel

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

11/30/12'

11/30/12'

11/30/12'



Woken Technology Inc.

CODE

DWG TITLE

SIZE

A4

REV

B

N(M)180°,N,for CFD400,LMR400

Crimp Connector

DWG NO.

00201CN1NDE01N

4

3

2

1