Rev:B

00201CN1NDE02N

Connector

6GHz 六角N(M)180°,N,for CFD400,LMR400 Crimp Connector





Features

- High Repeatability
- Low VSWR

Electrical Specifications

Frequency	DC-6GHz
Impedance	50Ohm
Connection	Hex N Male
VSWR	1.5:1(Max.)

Mechanical

Durability	500 Cycles


Environmental

Operating Temperature	-45℃~85℃

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold
Insulator	Teflon	
Inner Retaining Ring	Brass	
Gasket	Silicone	Red
Shell	Brass	Nickel
Ferrule	Brass	Nickel

Outling Drawing (Unit:mm) Tolerance:±0.1mm

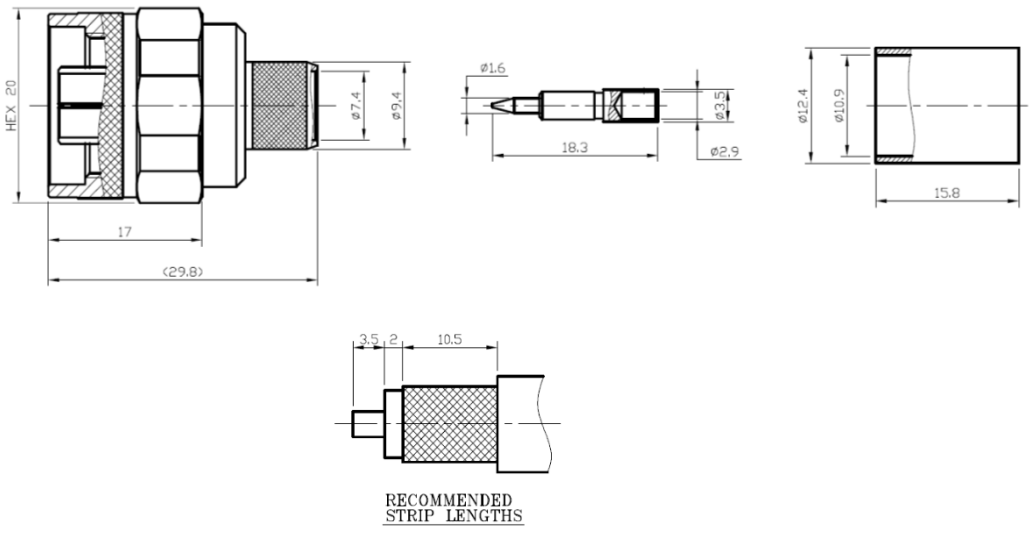

All Specification Changed Without Notification.