

Specifications:

Electrical:

Frequency:DC-6GHz

VSWR:1.3:1(Max.)

Impedance: 50Ohm

Connection: N Female

Mechanical:

Durability:500 Cycles


Mating:5/8-24 Thread

Environmental:

Temperature: -40°C~85°C

Vibration:MIL-STD-202 Meth.204



Corrosion:MIL-STD-202 Meth.101(5% salt solution)

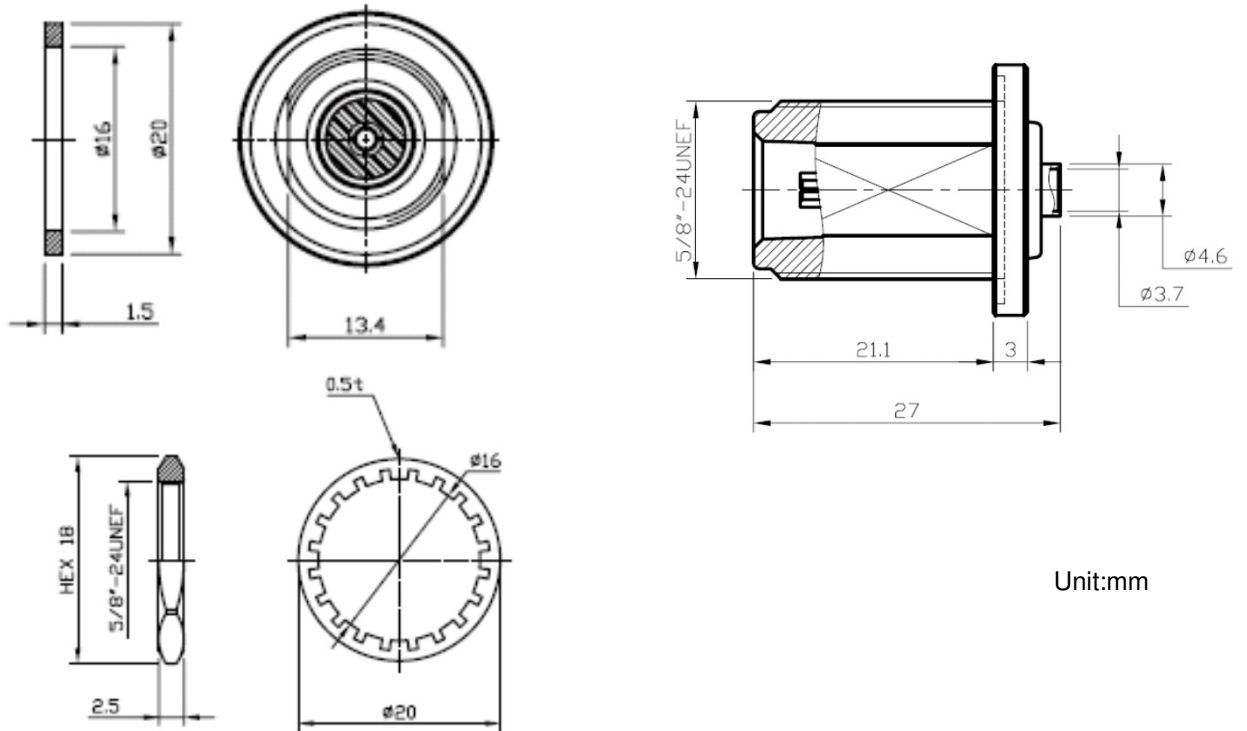

Unit:mm

Material:

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Cable Body	Brass	Gold
O Ring	Silicone	
Washer	Brass	Nickel
NUT	Brass	Nickel

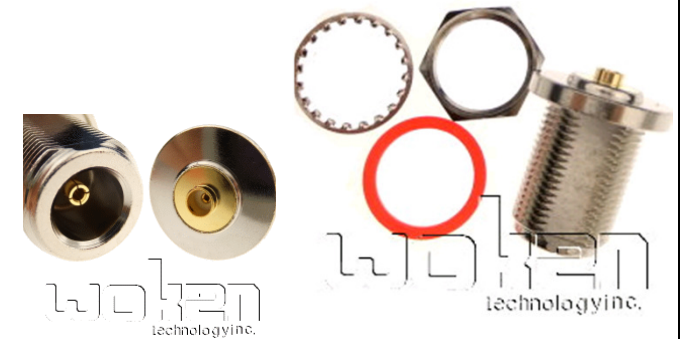

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:					  Woken Technology Inc.	
INTEGRAL DIMENSIONS ± TOLINT			ANGULAR DIMENSIONS ±TOLANG			
x ±0.38 .xx ±0.15			HOLES UNDER Ø5.0 ±0.05			
.x ±0.25 .xx x ±0.05						
THIRD ANGLE PROJECTION		DRAWN	Terence	11/30/12'	DWG NO.	
		ENGR	Jack	11/30/12'		
		APVD	James	11/30/12'		
					SIZE A4	Direct Solder Connector
					REV C	
					00201CN2NEF02N	