



00201CX1GCA01N

Connector

6GHz MMCX(P)180°,G,for RG316 Crimp Connector

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-6GHz
VSWR	1.3:1(Max.)@DC-3GHz 1.5:1(Max.)@3-6GHz
Impedance	50Ohm
Connection	MMCX Plug

Mechanical

Durability	500 Cycles
------------	------------



Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------



Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Brass	Gold
Insulator	Teflon	
C-Ring	Beryllium Copper	Gold
Cable Body	Brass	Gold
Ferrule	Brass	Gold

Outling Drawing (Unit:mm) Tolerance:±0.1mm

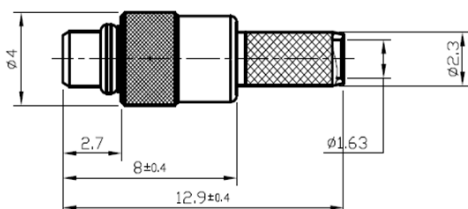

HEX Crimp Size : .128"



RECOMMENDED
STRIP LENGTHS