



00201CX1GEG02N

Connector

6GHz MMCX(P)180°,G,for
SFL405,Ultra-Flex .086 Solder
Connector

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-6GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection	MMCX Plug

Mechanical

Durability	500 Cycles
------------	------------

Environmental




Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Contact Pin	Brass	Gold
Insulator	Teflon	
Cable Body	Brass	Gold
C Ring	Beryllium Copper	Gold

Outling Drawing (Unit:mm) Tolerance:±0.1

A:Ø2.4

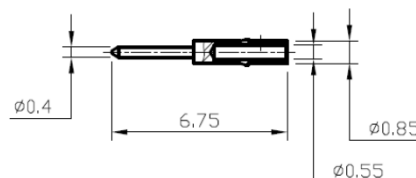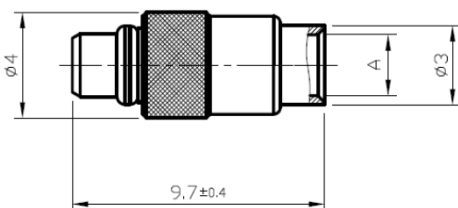

All Specification Changed Without Notification.