



00201CX1GPR01N

Connector

6G MMCX(P)180°.G.Receptacle PCB Connector

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-6GHz
Impedance	50Ohm
Connection	MMCX Plug
VSWR	1.3:1(Max.)

Environmental

Operating Temperature	-45°C~85°C
-----------------------	------------




Mechanical

Durability	500 Cycles
------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Brass	Gold
C-Ring	Beryllium Copper	Gold
Insulator	Teflon	

Outling Drawing (Unit:mm) Tolerance:±0.1mm

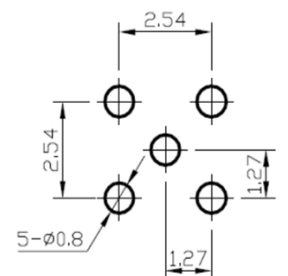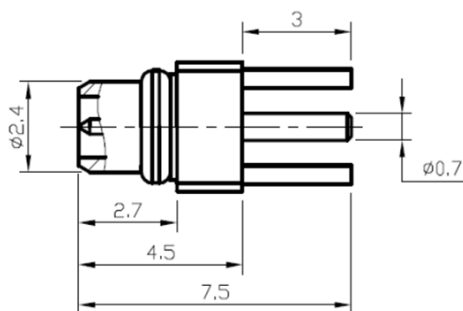

REFERENCE
P.C.B LAYOUT