Rev:A

00201CX2GCD01N

Connector

6GHz MMCX(J)180°,G,for RG316DS Crimp Connector

Features

- High Repeatability
- Low VSWR

Electrical Specifications

Frequency	DC-6GHz
Impedance	50Ohm
Connection	MMCX Jack
VSWR	1.3:1(Max.)

Mechanical

Durability	500 Cycles

Environmental

Operating Temperature	-45℃~85℃

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
Ferrule	Brass	Gold

Outling Drawing (Unit:mm) Tolerance:±0.1mm

A:Ø3.9,B:Ø3.2

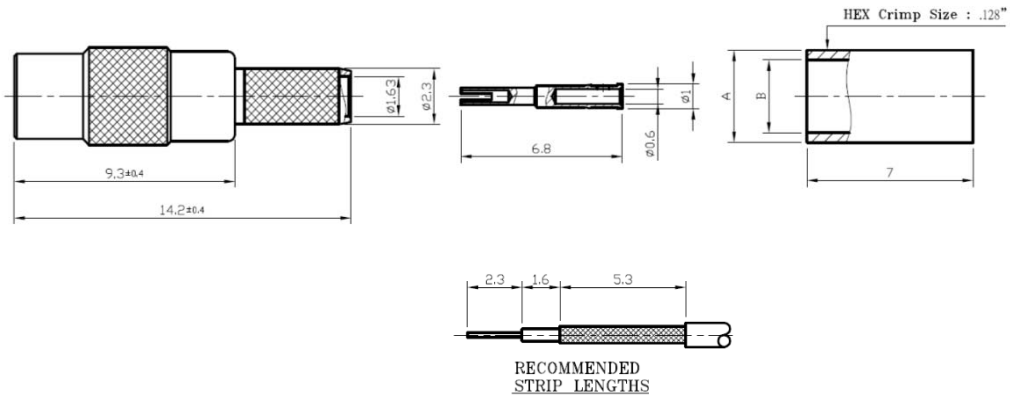

All Specification Changed Without Notification.