



00201CX2GPR02N

Connector

6GHz MMCX(J)180°,G,End Launch PCB Connector

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-6GHz
Impedance	50Ohm
Connection	MMCX Jack
VSWR	1.3:1(Max.)

Environmental

Operating Temperature	-45°C~85°C
-----------------------	------------




Mechanical

Durability	500 Cycles
------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	

Outling Drawing (Unit:mm) Tolerance:±0.1mm

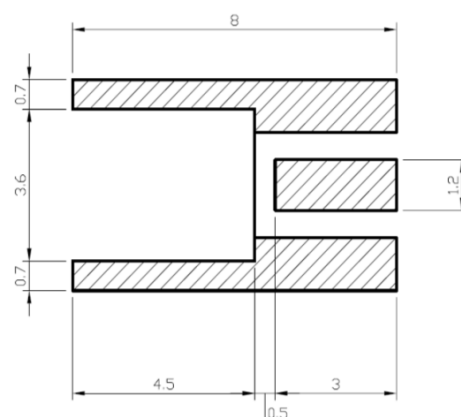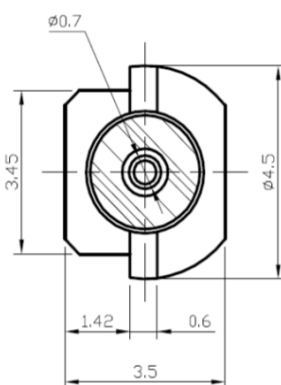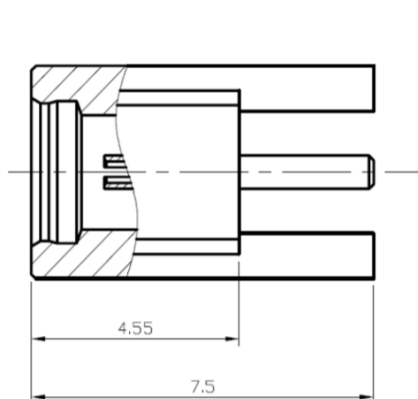

RECOMMENDED
P.C.B LAYOUT