

4

3

2

1

Features:

High Repeatability
Low VSWR

**Specifications:****Electrical:**

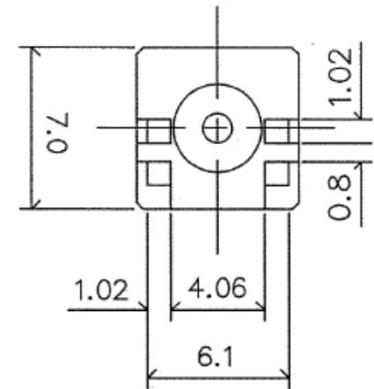
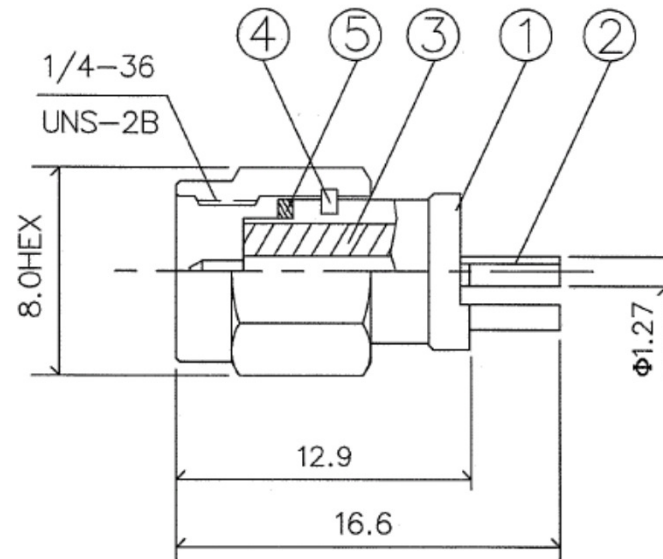
Frequency:DC-12.4GHz
VSWR:1.3:1(Max.)
Impedance: 50Ohm
Connection: SMA Male
Working voltage: 500 Vrms Max.

Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -65°C~155°C

**Material:**

Part	Material	Plated
Body	Brass	Gold
Contact Pin	Brass	Gold 20u"
Insulator	Teflon	
C Ring	BeCu	
Gasket	Silicone Rubber	


UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT

x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

THIRD ANGLE PROJECTION



ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

DRAWN

Terence

11/30/12'

ENGR

Jack

11/30/12'

APVD

James

11/30/12'



Woken Technology Inc.

CODE

DWG TITLE

12.4GHz SMA(M)180° ,End Launch

SIZE

A4

PCB Connector

REV

B

DWG NO.

002W0CA1GP901L

4

3

2

1