



002W0CN1NCB05L

Connector

6GHz 六角N(M)180° ,N,for
RG400/RG142 Crimp Connector

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-6GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection	N Male

Environmental

Operating Temperature	-40°C~85°C
Vibration	MIL-STD-202 Meth.204
Corrosion	MIL-STD-202 Meth.101(5% salt solution)



Mechanical

Durability	500 Cycles
Mating	5/8-24 Thread coupling

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold
Insulator	Teflon	
Inner Retaining Ring	SUS304	
Gasket	Silicone Rubber	
Ferrule	Brass	Nickel

Outling Drawing (Unit:mm)

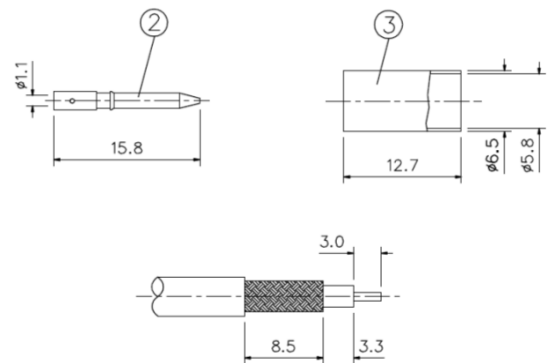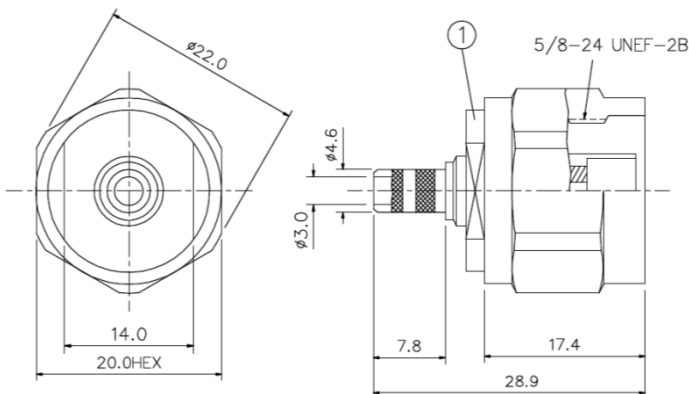

Recommended Cable Stripping DIM'S

All Specification Changed Without Notification.