




002W1CA1GEF99N

Connector

18GHz SMA(M)180°,G, for
RG402,.141 Direct Solder
Connector

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-18GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection	SMA Male

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Contact Pin	Brass	Gold
Insulator	Teflon	
Inner Rataining Ring	Stainless Steel	
Gasket	Silicone Rubber	

Outling Drawing (Unit:mm)

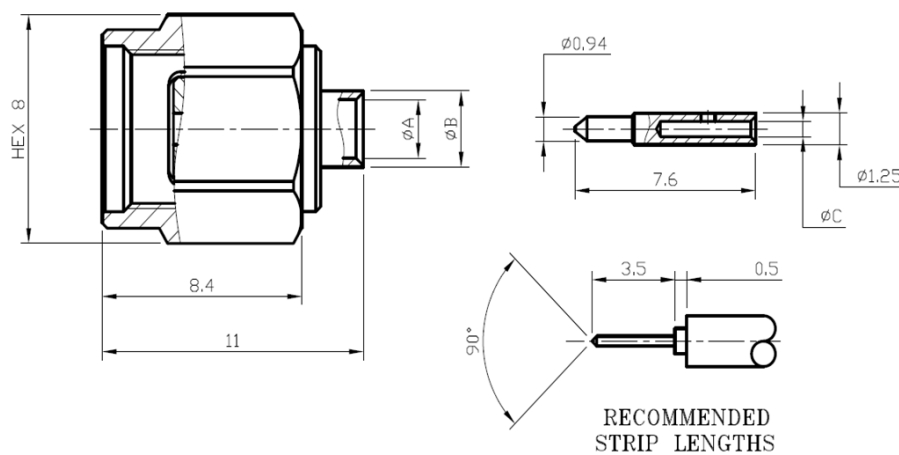

A:3.7 $^{+1.0}_{-0}$ B:4.6 $^{+0.05}_{-0}$ C:1.0 $\pm$ 0.03