



002W1CA1GEY02N

Connector

18GHz SMA(M)180° ,G,for Ø.047
Semi-Rigid,Semi-Flex Direct
Solder Connector

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-18GHz
VSWR	1.3:1(Max.)
Impedance	50Ohm
Connection	SMA Male

Mechanical

Durability	500 Cycles
------------	------------




Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Gold
Contact Pin	Brass	Gold
Insulator	Teflon	
Inner Retaining Ring	Stainless Steel	
Gasket	Silicone Rubber	
Body	Brass	Gold

Outling Drawing (Unit:mm) Tolerance:±0.1

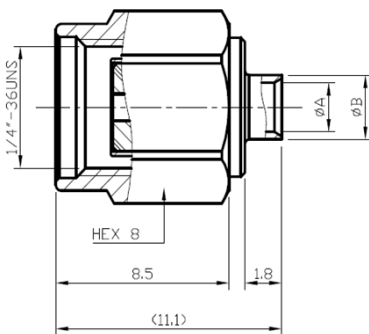

A:1.3, B:2.3,C:0.4

All Specification Changed Without Notification.