



0060041A2N301V

Adapter

6GHz QMA(M)–SMA(F) Adapter/Nickel

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-6GHz
VSWR	1.25:1(Max.)
Impedance	50Ohm
Connection 1	QMA Male
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Phosphor Bronze	Gold
Insulator	PTFE	
Shell	Brass	Nickel

Outling Drawing (Unit:mm) Tolerance:±0.1mm

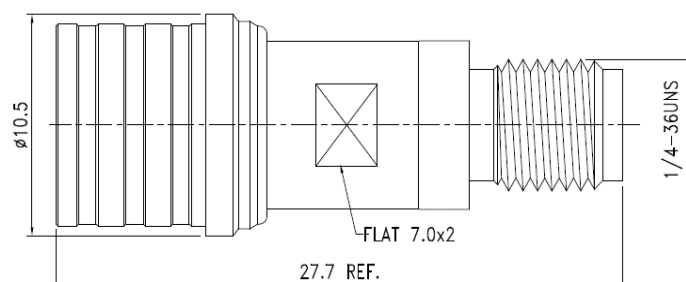

Test Report

