




00600A1A1G601L

Adapter

**18GHz 50Ω SMA(M)–SMA(M)
Adapter/Stainless Steel/Air
Insulator**

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	DC-18GHz
VSWR	1.1:1(Max.)
Insertion Loss	0.2dB(Max.)
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	SMA Male

Mechanical

Durability	500 Cycles
------------	------------





Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
C-Ring	Beryllium Copper	
Gasket	Silicon	
Shell	Stainless Steel	Passivated

Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

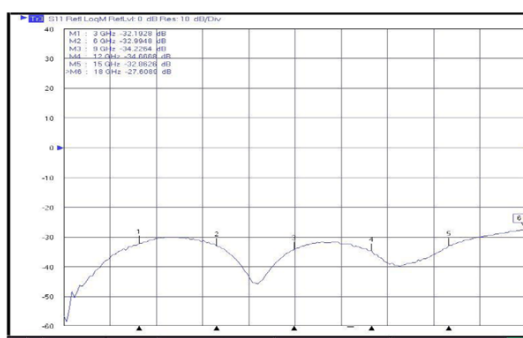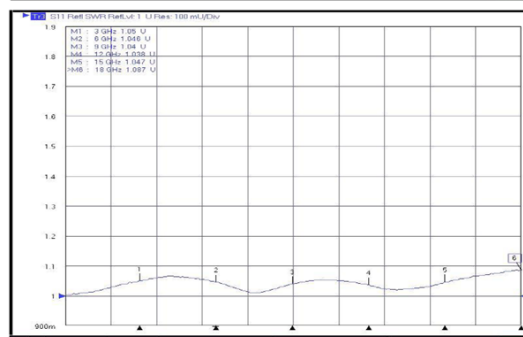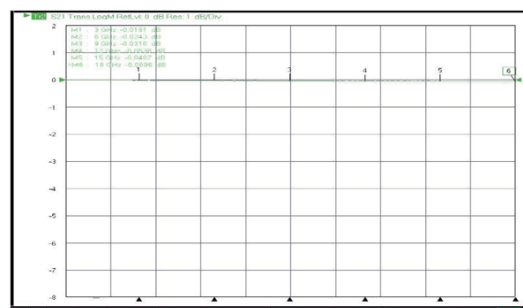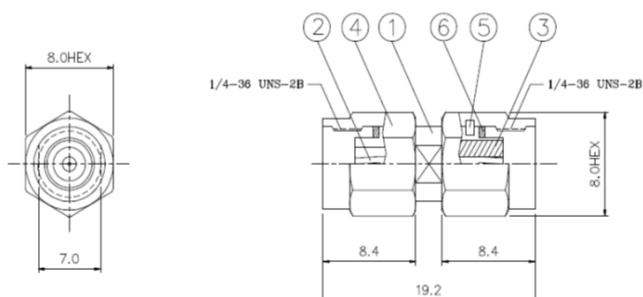

All Specification Changed Without Notification.