



00600A1A1GA02L

Adapter

10GHz 50Ω SMA(M)–SMA(M)
Adapter/Gold/Air Insulator

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	DC-10GHz
VSWR	1.15:1(Max.)
Insertion Loss:	0.2dB(Max.)
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	SMA Male

Mechanical




Durability	500 Cycles
------------	------------

Environmental


Operating Temperature	-65°C~155°C
-----------------------	-------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Brass	Gold
Insulator	Teflon	
C-Ring	Beryllium Copper	
Gasket	Silicone	
Shell	Brass	Gold



Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

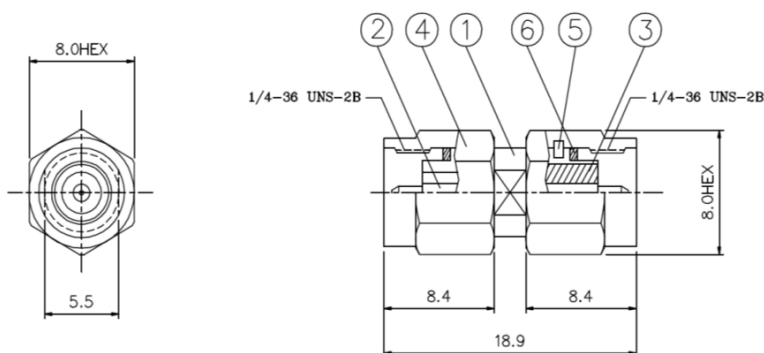

All Specification Changed Without Notification.