



00600A1A2GA01L

Adapter

10GHz 50Ω SMA(M)–SMA(F)
Adapter/Gold/Air Insulator

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications


Frequency	DC-10GHz
VSWR	1.15:1(Max.)
Insertion Loss	0.15dB(Max.)
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------

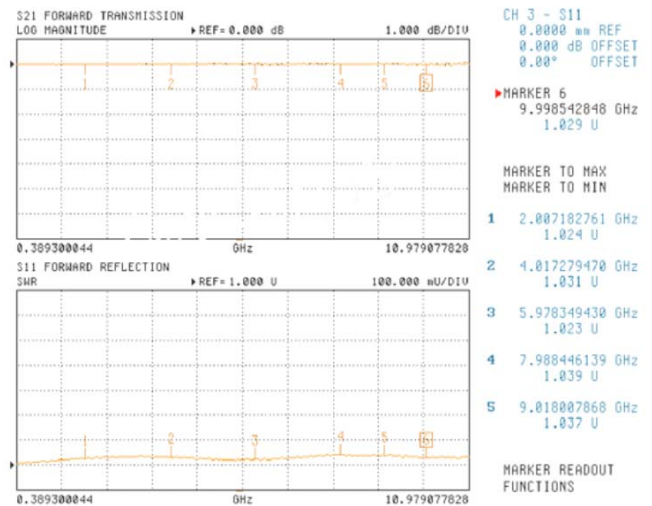

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
C-Ring	Beryllium Copper	
Gasket	Silicon	
Shell	Brass	Gold

Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

