



00600A1A2N301G

Adapter


18GHz 50Ω SMA(M)/Stainless-
SMA(F)/Nickel 2Hole Spring
Adapter

Features

- High Repeatability
- Low VSWR



Test Report

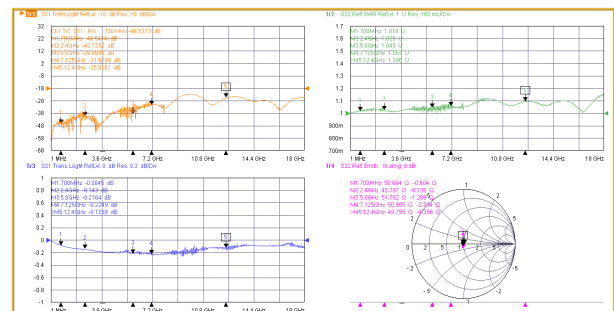

Electrical Specifications

Frequency	DC-18GHz
VSWR	1.15:1(Max.)@DC-6GHz 1.30:1(Max.)@6-12GHz 1.35:1(Max.)@12-18GHz
Insertion Loss	0.3dB(Max.)
Impedance	50Ω
Connection 1	SMA Male
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
Spring Force	400gf±30gf~590gf±30gf@0~1.7mm



Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold
Insulator	Teflon	
Spring	SWP	Nickel
Inner Retaining Ring	Brass	
O-ring	Silicone	
Nut	Stainless Steel	

Outling Drawing (Unit:mm)

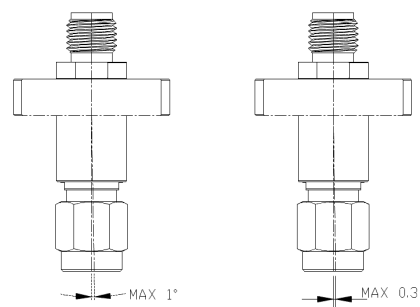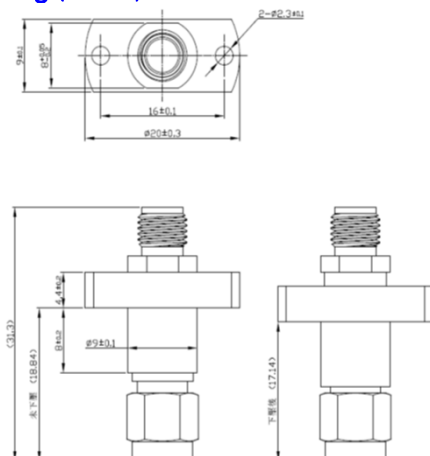

All Specification Changed Without Notification.