



00600A1A3G601L

Adapter


**18GHz 50Ω SMA(M)–Reverse SMA(M)
Adapter/Stainless Steel/Air
Insulator**

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

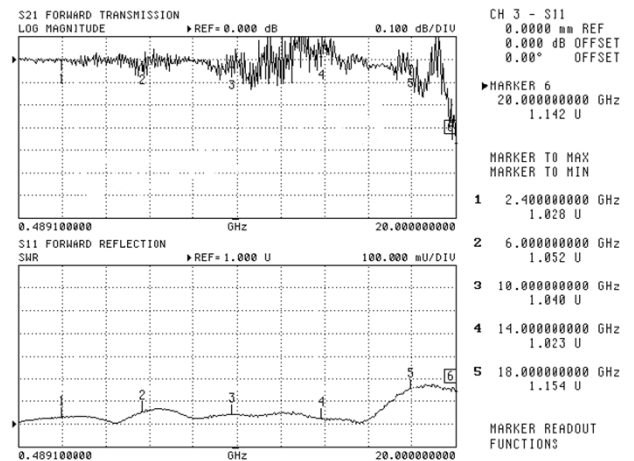

Electrical Specifications

Frequency	DC-18GHz
VSWR	1.1:1(Max.)
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	Reverse SMA Male

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-65°C~155°C
-----------------------	-------------

Material

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
Gasket	Silicone	
C-ring	Beryllium Copper	
Shell	Stainless Steel	

Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

