



# 00600A1A3GA02L

## Adapter

### 10GHz 50Ω SMA(M)–Reverse SMA(M) Adapter/Gold/Air Insulator

#### Features

- ✓ High Repeatability
- ✓ Low VSWR





woken  
technology inc.



woken  
technology inc.

#### Test Report

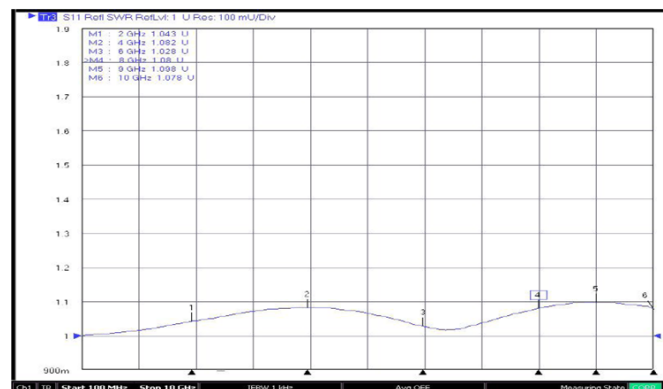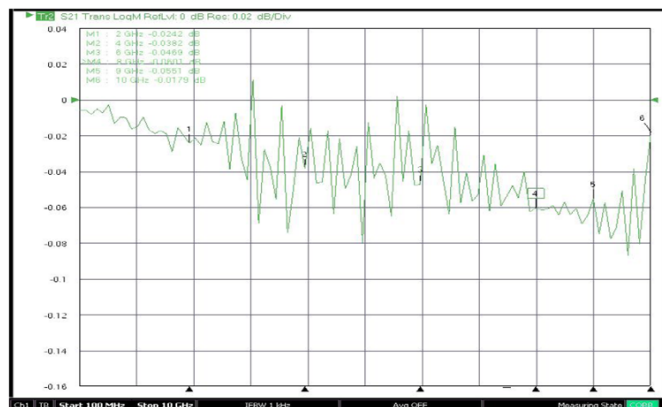

#### Electrical Specifications

|                |                  |
|----------------|------------------|
| Frequency      | DC-10GHz         |
| VSWR           | 1.25:1(Max.)     |
| Insertion Loss | 0.1dB(Max.)      |
| Impedance      | 50Ohm            |
| Connection 1   | SMA Male         |
| Connection 2   | Reverse SMA Male |

#### Mechanical

|            |            |
|------------|------------|
| Durability | 500 Cycles |
|------------|------------|


#### Environmental

|                       |             |
|-----------------------|-------------|
| Operating Temperature | -65°C~155°C |
|-----------------------|-------------|

#### Material

| Part       | Material         | Plated |
|------------|------------------|--------|
| Body       | Brass            | Gold   |
| Center Pin | Beryllium Copper | Gold   |
| Insulator  | Teflon           |        |
| C-Ring     | Beryllium Copper |        |
| Gasket     | Silicone         |        |
| Shell      | Brass            | Gold   |

Outling Drawing (Unit:mm) Tolerance:X:±0.2mm X.X:±0.1mm,X.XX:±0.05mm

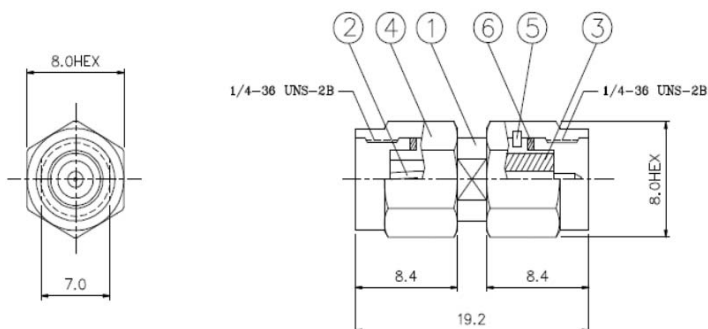

All Specification Changed Without Notification.